

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE

No. 1357

EFFECT OF COMBUSTOR-INLET CONDITIONS ON PERFORMANCE
OF AN ANNULAR TURBOJET COMBUSTOR

By J. Howard Childs, Richard J. McCafferty
and Oakley W. Surine

Flight Propulsion Research Laboratory
Cleveland, Ohio



Washington
July 1947

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE NO. 1357

EFFECT OF COMBUSTOR-INLET CONDITIONS ON PERFORMANCE OF AN ANNULAR TURBOJET COMBUSTOR

By J. Howard Childs, Richard J. McCafferty
and Oakley W. Surine

SUMMARY

The combustion performance and particularly the phenomenon of altitude operational limits was studied by operating the annular combustor of a turbojet engine over a range of conditions of air flow, inlet pressure, inlet temperature, and fuel flow. The combustor investigated was not the latest version of this combustor and the data are presented primarily because they are indicative of general trends and phenomena that apply to a large class of turbojet combustors.

Information was obtained on the combustion efficiencies, the effect on combustion of inlet variables, the altitude operational limits with two different fuels, the pressure losses in the combustor, the temperature and velocity profiles at the combustor outlet, the extent of afterburning, the fuel-injection characteristics, and the condition of the combustor basket.

The combustor operated at efficiencies above 90 percent and could produce a temperature rise far in excess of the engine requirement when the simulated altitude was 8000 feet or more below the operational limits. As the simulated altitude was progressively increased, the combustion efficiency and the obtainable temperature rise both decreased. Above the operational limits, the maximum obtainable temperature rise was below the value required for engine operation.

Investigations in which the combustor-inlet conditions of pressure, temperature, and velocity were independently altered through a wide range showed that as (1) the inlet pressure was decreased, (2) the inlet temperature was decreased, or (3) the inlet velocity was increased, the resulting unfavorable changes in combustor performance were as follows: (1) resonant combustion appeared and became increasingly severe; (2) the combustion

efficiency decreased; and (3) a maximum temperature rise began to appear in the curve of combustor temperature rise against fuel-air ratio. Both the maximum obtainable temperature rise and the fuel-air ratio at which it occurred decreased as the combustor-inlet conditions became more adverse. The effect of altitude previously noted and the existence of altitude operational limits are explained in terms of the effects of combustor-inlet conditions on performance.

INTRODUCTION

Investigations of turbojet engine performance in the Cleveland altitude wind tunnel have indicated that for each engine rotational speed an altitude exists above which engine operation is impossible. The performance of an annular combustor of a turbojet engine was therefore investigated in the combustion laboratory to determine whether a correlation exists between the performance of the combustor and the altitude operational limits of the engine revealed by altitude-wind-tunnel research. The combustor investigated was not the latest model of this engine and the data are presented primarily as being indicative of general trends and phenomena applying to a large class of turbojet combustors.

Combustor operation was attempted under conditions simulating engine operation at various altitudes and engine speeds to determine the altitude operational limits imposed on the engine by the combustor. The altitude operational limit as imposed by the combustor was compared with the altitude operational limit of the engine in the altitude-wind-tunnel investigation. The inlet conditions to which the combustor was sensitive were also determined. The effect on combustor performance of independently varying each of the parameters - inlet static pressure, inlet temperature, inlet velocity, and fuel-air ratio - was studied. In order to augment these data and to illustrate how combustor performance limits altitude operation, an investigation was made of combustor performance under conditions simulating engine operation at several different rotational speeds at a constant altitude of 20,000 feet. Information on the total-pressure drop across the combustor, the temperature and velocity profiles at the combustor outlet, the extent of afterburning, the fuel-injection characteristics, and the condition of the combustor basket is also presented.

APPARATUS AND INSTRUMENTATION

Combustor

A sketch of the combustor is shown in figure 1. The combustor fills the annular space around the compressor-turbine shaft of a turbojet engine. The over-all length of the combustor is $23\frac{3}{4}$ inches. Air is admitted into the combustion zone by means of an annular basket perforated with longitudinal rows of holes ranging in size from $7/32$ -inch diameter at the upstream end to $7/8$ -inch diameter at the downstream end. The fuel-injection system for the combustor consists of 24 nozzles (nominal capacity, 10.5 gal/hr; 80° hollow-cone spray; rated at 100 lb/sq in. pressure differential) equally spaced in the downstream side of a circular manifold on a $15\frac{11}{64}$ -inch pitch diameter. The fuel inlet is at the bottom of the manifold.

Setup

The general arrangement of the setup is diagrammatically shown in figure 2. The combustor was connected to the laboratory air supplies and exhaust systems; the air quantities and the pressures to the combustor were regulated by remote-controlled valves.

For inlet-temperature regulation, a part of the air was burned with fuel in a preheater and then uniformly mixed with the rest of the air upstream of the combustor. A close check was maintained on the completeness of combustion in the preheater to insure that no appreciable combustibles contaminated the air. Use of such a preheater to produce a temperature rise of 200° F in the inlet air resulted in a consumption of 3.9 percent of the oxygen, increased the carbon-dioxide content of the inlet air by 0.80 percent of the total air weight, and increased the moisture content by 0.36 percent of the total air weight.

Observation windows for viewing the combustion were provided in the combustor housing and in the outlet duct immediately downstream of the combustor as shown in figures 2 and 3. (The photograph of fig. 3 shows the side of the apparatus opposite to that in fig. 2.) Another observation window located in the downstream standpipe (fig. 2) provided an end view of the inside of the combustor.

The inlet and outlet ducts were fabricated according to the dimensions and the contours of the engine ducts leading to and from the combustor. Water sprays were installed in the pipe immediately downstream of the combustor-outlet duct for use when the heat radiated from the downstream duct became excessive.

Mixing vanes followed by flow straighteners were installed in the inlet duct to give uniform temperature and velocity profiles at the combustor inlet. Maximum differences between individual readings of inlet temperature and mean temperature were about 5° F and occurred only on test runs with high preheat temperatures. The maximum and minimum local velocities deviated from the mean velocity about 5 percent for most runs. The fuel nozzles in the combustor were periodically calibrated and replaced when necessary. For most runs these nozzles were well matched, having deviations of ± 3 percent from the mean fuel delivery when individually tested at a pressure differential of 25 pounds per square inch.

Instrumentation

The longitudinal section of the combustor and the adjacent ducting with the locations of instrumentation planes are shown in figure 1. Instrumentation plane 2 is located at the combustor inlet, which has a cross-sectional area of 0.647 square foot; instrumentation plane 3 is at the combustor outlet, where the annular cross-sectional area is 0.858 square foot.

Positions of thermocouple junctions and pressure taps in the various cross sections of the inlet and outlet ducts where measurements were made are shown in figure 4. In each cross section the instruments were located at centers of equal areas. At cross section 3 (fig. 4(a)), 15 circumferential locations of thermocouple rakes are shown as they were initially arranged. Later in the investigation the observation window at position r was replaced by an additional thermocouple rake. The positions at all cross sections were arranged clockwise as seen looking upstream.

Whenever no water spray immediately downstream of the combustor was used, the average exhaust-gas temperature at cross section 5 (fig. 4(b)) was obtained by the use of a traversing shielded chromel-alumel thermocouple. Both horizontal and vertical traverses were made with this instrument until the temperature pattern at this cross section was established. The variation in temperature was not more than 50° F; therefore, in later runs the instrument was fixed in a stationary position where the temperature was approximately equal to the average temperature at cross section 5.

Thermocouple-equipped fuel nozzles were used in some runs. Iron-constantan thermocouples were so peened into the wall of the dome of each of three fuel nozzles that the metal temperatures could be determined. Each thermocouple junction was located halfway between the orifice and the hexagonal shoulder of the nozzle. The three nozzles were installed in the following positions in the manifold (looking upstream, reading counterclockwise with 0° at top of combustor): 22.5° , 97.5° , and 187.5° .

Thermocouples were connected through multiple switches to two calibrated self-balancing potentiometers, one with a range of -100° to 700° F for reading the inlet temperatures and one with a range of 400° to 2400° F for reading the outlet temperatures. The fuel flows to the combustor and the preheater were separately metered with calibrated rotameters. The pressure differential across the fuel nozzles was measured when possible by a 50-inch mercury manometer; higher differentials were determined by obtaining the fuel-manifold pressure with a Bourdon gage and correcting for the combustor-inlet pressure. The air flow was metered by a square-edged orifice installed according to A.S.M.E. specifications and located upstream of all regulating valves. Manometers were used to obtain pressure readings.

PROCEDURE

Altitude Operational Limits

In order to determine the altitude operational limits of the engine as caused by the combustor, the performance was investigated with combustor-inlet conditions simulating engine operation over the range of altitudes and engine speeds where unsatisfactory combustion had been encountered in an altitude-wind-tunnel investigation of the complete engine. For each test point (corresponding to a simulated altitude and engine speed), the combustor operating conditions were taken from estimated performance curves of the engine for static (zero-ram) operation with the tail cone retracted. Any complete set of data can be satisfactorily used as a standard for determining the effect of inlet conditions upon combustion and for revealing the important phenomena and trends. The data used (fig. 5) were supplied by the Bureau of Aeronautics, Navy Department, and were based on the latest engine tests and performance estimates.

The method of determining the altitude operational limits consisted in maintaining the combustor-inlet conditions at the predetermined values (fig. 5) for each altitude-engine-speed point and gradually varying the fuel flow through a wide range. All points

at which the highest obtainable combustor-temperature rise was below that required for normal (no acceleration) operation of the engine (fig. 5(b)) were considered within the nonoperational range of the engine; all points at which the required temperature rise could be obtained were considered within the operational range. Data were recorded and combustion characteristics were noted as each of the following events occurred: (1) a mean combustor-outlet temperature was reached that was equal to or slightly above the temperature required for normal engine operation; (2) the type of combustion changed radically; (3) a peak in the mean combustor-outlet temperature was reached; (4) some localized outlet temperatures exceeded the potentiometer limit (2400°F) and were considered unsafe for the instruments, and so a further increase in fuel flow was inadvisable; and (5) the combustion ceased (a rich-limit blow-out). The sequence and the number of these events varied for the different test points.

The runs were first made with AN-F-22 fuel and then repeated with AN-F-28, Amendment-3, fuel. The important constants for the two fuels appear in the following table:

Fuel	Lower heating value (Btu/lb)	Hydrogen-carbon ratio	Specific gravity at 60°F	A.S.T.M. boiling points ($^{\circ}\text{F}$)			Tetraethyl lead (ml/gal)
				Initial	50-percent	Final	
AN-F-22	19,000	0.182	0.699	113	170	233	0
AN-F-28, Amendment-3	18,600	.174	.725	103	213	328	4.55

Effect of Combustor-Inlet Conditions on Performance

For the investigation of the effect of combustor-inlet conditions on performance, AN-F-22 fuel was used. For the initial part of this study, a point was selected in the range of operation where unsatisfactory combustion occurred that corresponded to an engine speed of 10,000 rpm and an altitude of 16,600 feet. The combustor-inlet pressure, temperature, and velocity were maintained at values simulating engine operation at this altitude-engine-speed point; the fuel flow was altered; and data were taken at each of several fuel-air ratios. One of the three combustor-inlet parameters (pressure, temperature, or velocity) was then maintained at some new value, the other two parameters were maintained at the original values, and the fuel flow

was again altered. This procedure was continued until each of the combustor-inlet parameters had been varied independently of the others. Combustor-inlet velocity rather than air mass flow was chosen as a parameter because the available combustion time is more directly related to flow velocity than to mass flow.

For the second part of this study, a point corresponding to an engine speed of 15,500 rpm and an altitude of 24,000 feet was selected in order to determine the effect of combustor-inlet conditions in this altitude-engine-speed range. Each of the combustor-inlet parameters was independently altered from the value simulating engine operation at this point.

Combustor Performance at Several Simulated

Engine Speeds at Constant Altitude

In order to illustrate how faulty combustor performance causes the altitude operational limits, the combustor was operated with inlet conditions simulating engine operation at seven different rotational speeds at an altitude of 20,000 feet. For each simulated altitude-engine-speed condition, the flow of AN-F-22 fuel was increased until no higher mean combustor-outlet temperature could be obtained, blow-out occurred, or local outlet temperatures became excessive and endangered the instrumentation. Data were taken at several fuel-air ratios for each set of combustor-inlet conditions.

Methods of Calculation

The average velocities and velocity pressures at cross sections 2 and 3 were computed from the air flow, the fuel flow, and the average temperatures and static pressures measured at these cross sections. The total-pressure drop through the combustor was obtained as follows: Static pressures at the combustor inlet and the combustor outlet were measured; the velocity pressures based on the average velocities were added to these static pressures to give total pressures at the combustor inlet and the combustor outlet; and the difference between these values was taken as the drop in total pressure through the combustor.

In order to determine velocity profiles, the local velocities at several points were computed from the measured values of temperature and total pressure at those points together with the static pressure at that cross section.

Thermocouple indications were taken as true values of temperature without correction for radiation or stagnation effects.

RESULTS AND DISCUSSION

Altitude Operational Limits

The data obtained in the investigation to determine the altitude operational limits are summarized in tables I and II. Whenever several individual readings of combustor-outlet temperatures fell below the potentiometer range (400° F), the mean combustor-outlet temperatures and dependent calculated data were omitted from the tables. Determination of individual readings below 400° F was considered unnecessary because the mean outlet temperatures that resulted with such low readings were in all cases far below the requirement of the engine for normal operation. The runs labeled "no combustion" (table I) are those where repeated attempts produced no burning at any fuel flow.

Altitude operational limits of the jet-propulsion engine, as determined by tests of the combustor using AN-F-22 and AN-F-28, Amendment-3, fuels are presented in figures 6(a) and 6(b), respectively. The curves separate the region where the combustor-outlet temperatures attainable were sufficient from the region where the combustor-outlet temperatures attainable were insufficient for normal operation of the engine. For convenience in referring to tables I and II, the data points on the figures are identified by numbers. The minimum operational ceiling with AN-F-22 fuel (fig. 6(a)) was at an altitude of 16,400 feet and occurred at a simulated engine speed of 8000 rpm; at a simulated engine speed of 17,500 rpm the operation was satisfactory to an altitude of 34,000 feet. With AN-F-28, Amendment-3, fuel (fig. 6(b)), the minimum ceiling was at 14,600 feet and also occurred at a simulated engine speed of 8000 rpm; at engine speeds above 17,000 rpm operation was satisfactory to altitudes higher than 30,000 feet.

Variations other than those indicated by the operational-limit curves were observed in the combustion characteristics of the two fuels. Ignition was easier with AN-F-22 fuel than with AN-F-28 fuel. In the region immediately below the altitude-operational-limit curves, AN-F-28 fuel generally produced more flickering of the flames than did AN-F-22 fuel. When AN-F-28 fuel was used at simulated engine speeds below 12,000 rpm, the flame flickered and fluctuations occurred in the combustor-outlet temperatures at altitudes as much

as 3000 feet below the operational-limit curve (fig. 6(b)). When operating with either fuel at simulated engine speeds below 8000 rpm, combustion sometimes ceased when the fuel flow was decreased to low values (lean-limit blow-out). This phenomenon was not encountered at high simulated engine speeds.

The combustor operated at efficiencies above 90 percent and was capable of producing outlet temperatures far in excess of the engine requirement when the simulated altitude was 8000 feet or more below the operational limits. As the simulated altitude was increased: (1) resonant combustion appeared and became increasingly severe; (2) the combustion efficiency decreased; and (3) the temperature rise through the combustor began to pass through a maximum value (with variation of fuel-air ratio) within the fuel-air-ratio range investigated. Both the maximum temperature rise obtainable and the fuel-air ratio at which it occurred decreased as the simulated altitude was increased. The resonant combustion, which was encountered at altitudes near the operational limits, was characterized by one or more of the following conditions: rapid flickering at the base of the flame, noisy vibration of the combustor and adjacent ducting, and fluctuation of the combustor-outlet temperatures. (In order to distinguish between the several types of resonance, the kind of combustion occurring during each run was given a letter designation.)

The altitude-operational-limit curves of figure 6 compared with the corresponding curve determined by altitude-wind-tunnel tests of the complete engine using AN-F-22 fuel are shown in figure 7. Operational failures at high engine speeds (above 16,000 rpm), which were encountered in the wind-tunnel investigation of the engine, did not occur in the combustor tests. One possible cause of this difference might be that nonuniform flow conditions existed at the combustor inlet in the engine, whereas in the combustor studies a uniform inlet-velocity profile was maintained.

Effect of Combustor-Inlet Conditions on Performance

The effect of combustor-inlet conditions on the performance of the combustor is shown in figures 8 and 9, where the measured temperature rise through the combustor is plotted as a function of fuel-air ratio. For estimation of combustion efficiencies, curves for 60 percent, 80 percent, and 100 percent of the theoretical temperature rise are included in both figures. The theoretical-temperature-rise curves of figure 8 are based on an initial temperature of 65° F; the corresponding curves of figure 9 are based on an initial temperature of 190° F.

The curves in figure 8 show the effects on combustion of independently varying the combustor-inlet pressure, temperature, and velocity from conditions that simulate zero-ram engine operation at an engine speed of 10,000 rpm and an altitude of 16,600 feet.

Figure 8(a) indicates the effect on combustor performance of altering the combustor-inlet static pressure while maintaining the inlet temperature and velocity constant. When the inlet pressure was high, the combustion efficiency was above 95 percent and the temperature rise through the combustor increased throughout the range of fuel-air ratios investigated. Operation at fuel-air ratios higher than 0.018 was not attempted because local outlet temperatures exceeded the safe limits of the instrumentation. When the inlet pressure was low, the combustion efficiency was low and the temperature rise through the combustor passed through a maximum value at a fuel-air ratio much leaner than the over-all stoichiometric mixture; beyond this value the combustion efficiency decreased rapidly with increase in the fuel-air ratio. Both the maximum temperature rise attainable and the fuel-air ratio at which it occurred decreased as the inlet pressure was decreased. Resonance always became severe as the fuel-air ratio was increased past the value giving the maximum attainable temperature rise and a rich-limit blow-out occurred. Changes in the slopes of the combustor performance curves were always accompanied by changes in the type of operation, as shown by letter designations indicating various types of resonance beside the data points on the figure.

Similar data showing the effect of altering the combustor inlet-temperature are presented in figure 8(b). Comparison of figures 8(a) and 8(b) indicates that a decrease in combustor-inlet temperature produced the same general effects on performance as a decrease in combustor-inlet pressure. Figure 8(c) shows the effect of altering the combustor-inlet velocity. An increase in the air velocity had the same general effect on performance as a decrease in inlet pressure or inlet temperature.

Similar results obtained with each of the combustor-inlet parameters independently varied from conditions simulating engine operation at 15,500 rpm and an altitude of 24,000 feet are presented in figure 9; each of the combustor-inlet parameters had the same general effect on performance at the high-altitude, high-engine-speed point as at the low-altitude, low-engine-speed point of figure 8.

In each of the families of curves shown in figures 8 and 9, the lower curves in the family fall farther apart although the curve

parameters change in nearly equal increments, which indicates that a given increment in any one of the combustor-inlet parameters produces more of an effect upon combustion performance as that parameter becomes more adverse to combustion.

In figure 9 sharp breaks occur in some of the curves. Such discontinuities were accompanied by equally sudden changes in the type of combustion. For example, at fuel-air ratios below 0.0145, where the break occurs in the lowest curve in figure 9(c), the combustor operated with very little resonance; at fuel-air ratios above 0.0145, the flame moved to a new seat about 2 inches downstream of the fuel nozzles and became intermittent and noisy. The fuel-air ratio at which such abrupt changes in operation occurred varied slightly according to whether the point was approached by increasing or by decreasing the fuel flow and according to the rapidity with which the fuel flow was changed. Unless sudden changes in the type of combustion were observed, discontinuities were not drawn in the curves of figure 9.

In check runs it was found that the outlet temperature obtained for a given fuel-air ratio could be reproduced only when operating under conditions normally giving little resonance. When resonance was pronounced, as the fuel flow was increased (all other conditions held constant), the flame would sometimes be extinguished at fuel-air ratios below those where operation had continued in previous attempts. Some points where such rich-limit blow-outs occurred are indicated in figures 9(b) and 9(c). In the intermediate fuel-air-ratio range of figures 8(b) and 8(c), dual performance curves for the combustor were obtained and these curves are shown by dot-and-dash lines. This tendency of the combustor to drift into different modes of operation existed when operating under conditions that gave resonant combustion.

Combustor Performance at Several Simulated Engine

Speeds at Constant Altitude

In order to illustrate how faulty combustor performance causes the altitude operational limits, figures 10 and 11 are presented. Results are shown in figure 10 for which data were taken over a range of fuel-air ratios with combustor-inlet conditions simulating engine operation at each of seven engine speeds at an altitude of 20,000 feet. The measured values of temperature rise through the combustor are plotted against the fuel-air ratios used to obtain

them. Each of the resulting curves has the same general shape as the curves of figures 8 and 9. Curves for 100-percent, 80-percent, and 60-percent theoretical temperature rise are indicated by dashed lines. The points where the curves surpass the temperature-rise requirement of the engine are indicated by symbols that are connected by a dotted line. At the intermediate simulated engine speeds (8000 and 10,000 rpm) blow-out occurred before the temperature rise reached the engine requirement.

The temperature-rise requirement of the engine for normal operation at various engine speeds at an altitude of 20,000 feet is shown in figure 11. Values of the maximum temperature rise obtainable with various simulated engine speeds at this altitude (taken from the peaks of the curves in fig. 10) are connected by a dotted line. The resulting curve falls below the temperature-rise-requirement curve between engine speeds of 6500 and 11,300 rpm. The nonoperational range therefore exists between 6500 and 11,300 rpm at an altitude of 20,000 feet.

An analysis of the causes of the altitude operational limits can be made by following a constant-altitude path at 20,000 feet, going from low to high engine speeds, observing what happens to engine performance (figs. 10 and 11), and examining these happenings in terms of the effects of the combustor-inlet conditions on combustion performance. The combustor-inlet pressures, temperatures, and velocities existing in the engine at an altitude of 20,000 feet at various rotational speeds are shown in figure 11. Starting at an engine speed of 6000 rpm, the combustor produces the temperature-rise requirement of the engine. At this point, the combustor-inlet pressure and temperature are relatively low, and both are therefore adverse to combustion. The inlet velocity is very low, however, and a low velocity has a favorable effect on combustion enabling the combustor to give the required temperature rise.

As the engine is accelerated to higher engine speeds, the combustor-inlet pressure and temperature increase; these changes are beneficial to combustion. At the same time, however, the inlet velocity increases very rapidly and this change has a detrimental effect on combustion. The unfavorable effect of the rapidly increasing inlet velocity more than counterbalances the beneficial changes in the other operating conditions, as is evidenced by the decrease in temperature rise obtainable, until the combustor ceases to meet the engine requirements when a speed of 6500 rpm is reached.

As the simulated engine speed is increased through the non-operational region, the inlet pressure and temperature increase at accelerating rates whereas the inlet velocity increases at a decelerating rate with increase in simulated engine speed. At a simulated speed of about 10,000 rpm, the favorable effects of the rapidly increasing inlet pressure and temperature become large enough to offset the adverse effect of the increasing inlet velocity and the temperature rise obtainable begins to increase with simulated engine speed. At a speed of 11,300 rpm, the temperature rise obtainable is equal to the temperature rise required. Above an engine speed of 11,300 rpm, the inlet velocity increases only slightly and approaches a maximum value whereas the inlet pressure and temperature increase rapidly and bring the combustor farther into the satisfactory operating range.

Pressure Drop through Combustor

A correlation of the combustor total-pressure drop is presented in figure 12. The ratio of the total-pressure drop to the inlet dynamic pressure $\Delta P_{2-3}/q_2$ is plotted against the ratio of the combustor-inlet density to the combustor-outlet density ρ_2/ρ_3 . In the appendix $\Delta P_{2-3}/q_2$ is shown to be a linear function of ρ_2/ρ_3 , and the predicted straight-line correlation is obtained in figure 12.

The derivation of the relation

$$\frac{\Delta P_{2-3}}{q_2} = f(\rho_2/\rho_3)$$

presented in the appendix assumes that the inlet dynamic pressure at cross section 2 q_2 is the effective value of q ; the relation is also valid, however, if the effective value of q has a fixed ratio to q_2 . In the annular combustor, both the cross-sectional areas of the flow passages and the ratio of air mass in the combustion zone to the total air mass continually change when passing downstream through the combustor. The ratio of the effective q to q_2 therefore continually changes as the flame seat moves downstream. Inasmuch as the location of the flame seat changed, especially under operating conditions that promoted resonant combustion, the preceding relation cannot be expected to hold exactly for this combustor and some scatter of the data points as indicated in figure 12 might be expected.

The isothermal $\Delta P_{2-3}/q_2$ is 1.62; however, when ρ_2/ρ_3 is 2.8, $\Delta P_{2-3}/q_2$ is about 2.1.

Temperature and Velocity Profiles at Combustor Outlet

Combustor-outlet temperature profiles for four representative runs are shown in figure 13. The combustor-inlet conditions for the run presented in figure 13(a) simulate engine operation at an engine speed of 10,000 rpm and an altitude of 16,600 feet and the mean combustor-outlet temperature is 150° F above required normal-operation temperature. The inlet conditions are approximately the same for the run presented in figure 13(b) and the mean outlet temperature is about 220° F higher than required normal-operation temperature. In figure 13(a) the mean outlet temperature is 968° F, the minimum recorded local temperature is 718° F, the maximum recorded local temperature is 1305° F, and the average temperature-rise deviation from the mean temperature rise through the combustor is $\pm 111^\circ$ F (± 12.4 percent). In figure 13(b) the mean outlet temperature is 1042° F, the minimum recorded local temperature is 640° F, the maximum recorded local temperature is 1600° F, and the average temperature-rise deviation from the mean temperature rise through the combustor is $\pm 156^\circ$ F (± 16.0 percent). The temperature profile is more uniform and the combustion efficiency is higher for the run presented in figure 13(a) than for the run presented in figure 13(b).

In check runs the outlet-temperature profiles could not always be exactly reproduced but consistent trends were indicated; the profiles became more uneven as the combustion efficiency became lower and as the temperature rise became higher. The localized high outlet temperatures (hot spots) became excessively high when the combustor basket was slightly off center. The positions of localized high temperatures also shifted from time to time, possibly as the result of progressive warping of the combustor basket.

The operating conditions listed in figures 13(c) and 13(d) simulated no particular altitude-engine-speed conditions but produced aggravated cases of uneven fuel distribution. The combustor-outlet temperature profiles are shown for these two runs in order to illustrate the effect of uneven fuel distribution.

In figure 13(c) the mean outlet temperature is 240°F , the minimum recorded local temperature is 170°F , the maximum recorded local temperature is 310°F , and the average temperature-rise deviation from the mean temperature rise through the combustor is $\pm 31^{\circ}\text{F}$ (± 13.8 percent). The mean temperature rise for the bottom one-fourth of the duct is 35 percent higher than the mean temperature rise for the top one-fourth of the duct.

In figure 13(d) the mean outlet temperature is 1222°F , the minimum recorded local temperature is 720°F , the maximum recorded local temperature is 1760°F , and the average temperature-rise deviation from the mean temperature rise through the combustor is $\pm 248^{\circ}\text{F}$ (± 28.1 percent). A low-temperature region occurs at the 1-o'clock position in the duct.

Typical velocity profiles at the combustor outlet are shown in figure 14 for three of the same runs for which temperature profiles appear in figure 13. The outlet-velocity profiles vary in uniformity as the outlet-temperature profiles vary; high local velocities usually result where high local temperatures occur. The velocities also definitely tended to remain low nearer the walls of the duct, regardless of temperature distribution. The inlet-velocity profiles are also shown in the figure for comparison.

Extent of Afterburning

The temperatures read at cross section 4 checked closely with those at cross section 3; no temperature rise due to afterburning was therefore indicated in any of the tests. A tenuous luminous flame, however, appeared to extend past cross section 3 in some of the runs.

A comparison of the mean combustor-outlet temperatures at cross section 3 with temperatures read with a shielded thermocouple at the downstream cross section 5 is shown in figure 15. The downstream temperatures are lower than the mean values at the combustor outlet and the differences are greater at high temperatures. The calculated temperature drop in the exhaust gas, with allowance for heat transfer through the pipe walls between cross sections 3 and 5, was 40°F , with the exhaust-gas temperature assumed to be 1000°F at cross section 3 and the temperature of the test cell assumed to be 80°F . When the mean temperature at cross section 3 is 1000°F , figure 15 shows the measured temperature at cross section 5 to be about 40°F lower. The data points on figure 15 therefore deviate from the

45° line by the expected amount and the readings of the shielded thermocouple at cross section 5 check those of the bare-wire thermocouples at cross section 3.

Characteristics of Fuel-Injection System

Hydraulic head in manifold. - The effect of the hydraulic head between the bottom and the top of the fuel manifold was evidenced during the investigation. As the fuel flow was decreased to a point where the pressure differential between the bottom of the manifold and the inside of the combustor approached the magnitude of the hydraulic head between the bottom and the top of the manifold, the nozzles at the top ceased to deliver enough fuel to sustain burning in that region. This partial cessation of burning always occurred at a fuel flow of about 75 pounds per hour.

The combustor-outlet temperature profile for a run in which the fuel flow was only 100 pounds per hour is shown in figure 13(c). The fuel distribution and outlet temperatures are higher at the bottom because of the hydraulic head within the manifold. The fuel nozzles were later calibrated while installed in the manifold by using a total fuel flow of about 100 pounds per hour; the results of this calibration are also shown in figure 13(c). The percentage variation of each nozzle from the mean fuel delivery is given with each nozzle position.

Fuel deaeration and vaporization within fuel-injection system. - During the runs in which the inlet temperatures were 240° F and higher, dark areas were observed near the top of the ring of flame (looking upstream) even though the fuel flows were high enough to overcome the effect of the hydraulic head within the fuel manifold. These dark areas indicated the presence of air or vaporized fuel in the nozzles at the top of the manifold, where gases generated therein would collect. This condition will hereinafter be referred to as "vapor lock." A fuel nozzle, when delivering gases, loses some of the cooling effects of the fuel and becomes overheated by the radiant heat from the flame, which aggravates the vapor-lock condition. It is reasonable to expect that under extreme conditions a vapor-locked nozzle could be heated to the extent that cracking of the fuel would cause the orifice to become clogged with carbon deposits. During the investigation such carbon deposits were formed in two nozzles.

This vapor-lock condition was investigated by peening iron-constantan thermocouples into the wall of the dome of each of three

fuel nozzles in the manner previously described. Table III shows the nozzle temperatures observed during various runs. When the inlet temperatures exceeded 290°F , the fuel nozzle located near the top of the manifold (22.5° position) showed a sudden marked increase in temperature, which may be explained by a reduction in the mass flow of fuel through the nozzle due to the presence of vapors. The nozzles located lower in the manifold did not show this rapid change in temperature at any of the inlet temperatures investigated. Temperatures within and above the boiling range of the fuel were attained in all three nozzles, indicating that vaporization of the fuel as well as deaeration was causing this trouble.

One manifestation of vapor lock is shown in figure 16 where the pressure differential across the fuel manifold and nozzles is plotted against the fuel flow for runs made with the same set of fuel nozzles. The pressure differential for a given fuel flow is seen to increase with combustor-inlet temperature after a critical inlet temperature is surpassed. As the fuel flow increases, the vapor-lock effect becomes less, as shown by the converging curves in figure 16.

Figure 13(d) shows the combustor-outlet temperature profile for a run in which the inlet temperature was 340°F ; deaeration and vaporization of the fuel within the fuel-injection system had resulted in vapor lock of the fuel nozzles at the top of the manifold and extinguished the flame at the 12- and 1-o'clock positions.

Condition of Combustor Basket

Warping of the combustor basket existed in places where local temperatures were high but never became excessive. No holes were burned in the basket during the tests, and no carbon deposits thicker than 0.002 inch were found on the walls of the basket. At the altitude conditions of most of the tests reported herein, blue-flame combustion prevailed; at low altitudes where yellow-flame combustion occurred, warping and carbon deposition became greater than with blue flames.

SUMMARY OF RESULTS

A combustion-laboratory investigation of the performance of an annular combustor gave the following results:

1. The lowest operational ceiling of the complete engine as determined by tests of the combustor operating with AN-F-22 fuel was at an altitude of 16,400 feet and occurred at a simulated engine speed of 8000 rpm. At a simulated engine speed of 17,500 rpm, the combustor operated satisfactorily to an altitude of 34,000 feet.

2. With AN-F-28 fuel, the minimum operational ceiling was at 14,600 feet and also occurred at a simulated engine speed of 8000 rpm. At simulated engine speeds close to the rated maximum of 18,000 rpm, operation was satisfactory to altitudes higher than 30,000 feet.

3. At altitudes of 8000 feet or more below the operational limits, the combustor operated at efficiencies higher than 90 percent and was capable of producing outlet temperatures far in excess of the engine requirements.

4. As the simulated altitude was progressively increased, approaching the operational limits: (1) Resonant combustion began and became increasingly severe; (2) the combustion efficiency decreased; and (3) the temperature rise through the combustor began to pass through a maximum value (with increase in fuel-air ratio) at a fuel-air ratio within the range investigated. Both the maximum temperature rise obtainable and the fuel-air ratio at which it occurred decreased as the simulated altitude was increased. Above the operational limits, the maximum obtainable temperature rise was below the value required for engine operation.

5. High combustor-inlet pressures and temperatures and low combustor-inlet velocities were favorable to combustion. When these combustor-inlet conditions were favorable to combustion, the combustor operated at efficiencies above 95 percent and the temperature rise through the combustor increased with an increase in fuel-air ratio throughout the range of fuel-air ratios investigated.

6. The combustion efficiency and maximum temperature rise obtainable decreased and resonance increased if: (1) The combustor-inlet pressure was decreased, (2) the combustor-inlet temperature was decreased, or (3) the combustor-inlet velocity was increased. Both the maximum obtainable combustor temperature rise and the fuel-air ratio at which it occurred decreased as these inlet conditions became more adverse.

7. The existence of altitude operational limits was accounted for by the effects of the combustor-inlet conditions on combustor performance.

8. The ratio of the total-pressure drop through the combustor to the inlet velocity pressure correlated as a linear function of the ratio of the combustor-inlet density to the combustor-outlet density. The linear relation was predicted by theoretical considerations. The isothermal total-pressure drop through the combustor was 1.62 times as great as the inlet velocity pressure.

9. Combustor-outlet temperature profiles became increasingly uneven as the temperature rise increased or as the combustion efficiency decreased.

10. Thermocouples located downstream of the combustor indicated temperatures consistent with those measured at the combustor outlet; no temperature rise due to afterburning was detected.

11. Vaporization and degradation of fuel within the fuel manifold and nozzles led to severe overheating of the nozzles, which caused nonuniform combustor-outlet temperature distributions and sometimes resulted in carbon deposition in the fuel nozzles.

12. Very little deterioration of the combustor basket occurred and no carbon deposits thicker than 0.002 inch were present.

Flight Propulsion Research Laboratory,
National Advisory Committee for Aeronautics,
Cleveland, Ohio, March 21, 1947.

APPENDIX - ANALYSIS OF TOTAL-PRESSURE

DROP THROUGH COMBUSTOR

The following symbols are used in the analysis:

k_1, k_2	dimensionless constants
m	mass flow per unit cross-sectional area, slugs/(sec)(sq ft)
q	dynamic pressure, lb/sq ft
ΔP	total-pressure change, lb/sq ft
T	absolute temperature, °R
V	velocity, ft/sec
ρ	density, slugs/cu ft

Subscripts (see fig. 1):

2	combustor inlet
3	combustor outlet

The total-pressure drop through the combustor is the sum of the pressure drop due to friction and the pressure drop due to momentum change:

$$\Delta P_{2-3} = \text{drop due to friction} + \text{drop due to momentum change}$$

When a simplified combustor of constant cross section is assumed,

$$\Delta P_{2-3} = \left(k_1 \frac{\rho_2 V_2^2}{2} \right) + \left[m(V_3 - V_2) + \frac{\rho_2 V_2^2}{2} - \frac{\rho_3 V_3^2}{2} \right]$$

When $\rho_2 V_2$ is substituted for m ,

$$\Delta P_{2-3} = k_1 \frac{\rho_2 V_2^2}{2} + \rho_2 V_2^2 \left(\frac{V_3}{V_2} - 1 \right) + \frac{\rho_2 V_2^2}{2} \left(1 - \frac{\rho_3 V_3^2}{\rho_2 V_2^2} \right)$$

and ρ_2/ρ_3 is substituted for V_3/V_2 ,

$$\Delta P_{2-3} = \frac{k_1}{2} \rho_2 V_2^2 + \frac{1}{2} \rho_2 V_2 (V_3 - V_2)$$

or, if the increase in mass due to fuel addition is ignored,

$$\Delta P_{2-3} = \frac{k_1}{2} \rho_2 V_2^2 + \frac{1}{2} \rho_2 V_2^2 \left(\frac{\rho_2}{\rho_3} - 1 \right)$$

Simplification gives

$$\Delta P_{2-3} = \frac{1}{2} \rho_2 V_2^2 \left(k_1 + \frac{\rho_2}{\rho_3} - 1 \right)$$

or

$$\frac{\Delta P_{2-3}}{q_2} = \frac{\rho_2}{\rho_3} - k_2$$

For any particular combustor, these relations are valid only if q_2 is equal to, or bears a fixed ratio to, the effective value of q .

TABLE 1 - PERFORMANCE DATA ON COMBUSTOR FROM INVESTIGATION TO DETERMINE ALTITUDE OPERATIONAL LIMITS WITH AN-P-22 FUEL

Point	Simu- lated engine speed (rpm)	Simu- lated alti- tude (ft)	Combus- tor-inlet static pressure (lb/sq in. absolute)	Combus- tor-inlet temperature (°F)	Combus- tor-inlet velocity (ft/sec)	Air flow (lb/sec)	Fuel flow (lb/hr)	Fuel- air ratio	Mean com- bustor-out- let tem- perature (°F)	Mean tem- perature rise through combustor (°F)	Ratio of actual to theoretical tempera- ture rise	Total-pres- sure drop through combustor (lb/sq in.)	Static-pres- sure drop through combustor (lb/sq in.)	Type of resonance (1)
1	10,000	16,600	13.19	84	226	9.53	600	0.0174	1096	1012	0.818	0.82	1.15	B-
			13.19	84	226	9.58	632	0.0183	1160	847	0.832	0.83	1.16	B-
			13.19	84	226	9.58	654	0.0190	931		0.833	0.79	1.02	D
2	10,000	20,000	11.10	74	233	8.51	377	0.0123	-----	Outlet temperatures below 400° F				A
			11.10	74	233	8.50	405	0.0132	-----	Outlet temperatures below 400° F				A
3	10,000	23,000	9.48	64	240	7.59	395	0.0145	-----	Outlet temperatures below 400° F				A
			9.48	64	240	7.59	405	0.0148	-----	Outlet temperatures below 400° F				A
4	10,000	30,000	6.40	45	271	6.00	-----	-----	-----	No combustion				-----
5	15,000	30,000	11.32	177	277	8.62	422	0.0136	600	423	0.434	0.76	0.78	B-
			11.32	177	277	8.62	440	0.0142	-----	Blow-out				A+
6	16,000	30,000	12.50	207	264	8.69	575	0.0184	1230	1023	0.796	0.85	1.10	B-
			12.48	207	264	8.69	595	0.0190	983	776	0.587	0.78	0.93	D+
			12.48	207	264	8.69	750	0.0240	-----	Blow-out				D+
7	17,000	30,000	13.51	240	255	8.61	705	0.0227	1474	1234	0.801	0.80	1.09	D-
			14.69	274	233	8.16	595	0.0202	1569	1295	0.838	0.72	0.98	B
8	18,000	30,000	14.69	275	233	8.19	652	0.0221	1654	1379	0.917	0.75	1.01	B-
9	16,500	40,000	9.80	140	241	6.89	403	0.0162	621	481	0.418	0.55	0.88	A
			9.80	140	241	6.89	445	0.0175	-----	Blow-out				A+
10	16,000	32,000	11.19	208	270	7.97	363	0.0123	781	576	0.651	0.74	0.80	B
			11.19	208	270	7.97	385	0.0134	827	621	0.768	0.76	1.25	B-
			11.19	205	270	7.97	420	0.0146	704	499	0.480	0.73	0.76	A
			11.19	205	270	7.97	480	0.0176	-----	Blow-out				A
11	16,500	30,000	12.88	224	266	8.78	570	0.0190	1282	1058	0.842	0.89	1.14	B
			12.88	225	267	8.80	610	0.0193	1362	1137	0.850	0.90	1.18	B
			12.88	225	267	8.79	630	0.0199	1015	790	0.574	0.85	1.00	E-
12	15,500	30,000	11.98	193	267	8.58	470	0.0152	990	797	0.741	0.83	0.99	A-
			11.95	192	266	8.56	500	0.0162	799	607	0.531	0.80	0.89	E
			11.98	192	266	8.56	630	0.0204	851	659	0.467	0.78	0.89	E+
			12.42	192	256	8.56	800	0.0260	-----	Blow-out				A+
13	14,000	20,000	16.39	162	264	12.19	785	0.0179	1298	1136	0.905	1.16	1.81	B-
			13.71	155	270	10.58	582	0.0153	988	833	0.766	1.01	1.25	B
			13.71	155	272	10.61	596	0.0156	1003	849	0.763	1.02	1.28	B
			13.58	155	272	10.61	608	0.0159	774	619	0.549	1.00	1.14	E
15	14,000	30,000	10.15	150	284	8.30	395	0.0132	-----	Outlet temperatures below 400° F				A
			10.19	150	284	8.25	456	0.0154	-----	Blow-out				A
16	14,500	26,000	11.88	162	272	9.15	460	0.0140	619	459	0.458	0.83	0.87	A+
			11.88	161	275	9.20	420	0.0157	-----	Blow-out				A+
			11.88	162	275	9.20	550	0.0166	-----	Blow-out				A+
			11.88	162	275	9.20	600	0.0181	-----	Blow-out				A+
17	12,000	17,000	15.07	127	256	11.60	760	0.0182	1234	1109	0.865	1.05	1.49	C-
			15.07	126	256	11.60	770	0.0184	1203	1075	0.832	1.09	1.52	D-
			15.00	126	259	11.61	795	0.0190	922	797	0.599	1.06	1.33	D+

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

18	12,000	19,000	14.18	120	266	11.03	688	0.0173	1122	1002	0.817	1.02	1.39	N
			14.18	120	266	11.01	730	0.0184	882	762	.688	Blow-out	1.20	E
			14.18	120	266	11.01	800	.0227	-----	-----	-----	-----	-----	A+
19	12,000	30,000	8.19	86	283	7.40	356	0.0133	-----	-----	-----	-----	-----	
			8.22	91	283	7.40	550	.0206	-----	-----	-----	-----	-----	
			8.22	91	283	7.40	600	.0225	-----	-----	-----	-----	-----	
20	15,500	28,000	13.10	191	264	9.30	605	0.0181	1231	1040	0.821	0.92	1.20	N
			13.10	191	264	9.30	640	0.0191	981	790	.596	.86	1.03	E
			13.10	191	264	9.30	900	.0289	940	749	.418	.83	.99	E+
21	8,000	17,000	10.41	50	198	7.09	305	0.0130	-----	-----	-----	-----	-----	
			10.41	50	198	7.09	350	.0137	511	461	0.461	0.50	0.55	A
			10.41	50	198	7.09	390	.0153	-----	-----	-----	-----	-----	A+
22	8,000	19,000	9.78	44	198	6.71	315	0.0130	-----	-----	-----	-----	-----	
			9.78	45	198	6.70	346	.0143	-----	-----	-----	-----	-----	A
			9.78	45	198	6.70	385	.0160	-----	-----	-----	-----	-----	A+
23	14,000	26,000	12.39	153	277	9.78	375	0.0107	599	446	0.570	0.88	0.92	E-
			12.39	153	277	9.78	539	.0112	539	366	.472	Blow-out	.86	E-
			12.39	153	277	9.78	500	.0142	-----	-----	-----	-----	-----	A
24	13,000	23,000	13.10	133	263	10.19	500	0.0136	881	748	0.763	0.92	1.12	N
			13.10	132	263	10.19	538	.0147	694	562	.531	.89	1.00	A
			13.10	132	263	10.19	730	.0199	-----	-----	-----	-----	-----	A+
25	6,000	20,000	7.99	17	142	4.17	332	0.0221	1197	1180	0.761	0.24	0.36	D-
			7.99	17	142	4.17	350	.0253	-----	-----	-----	-----	-----	A
			7.99	17	142	4.17	373	.0248	-----	-----	-----	-----	-----	A
			7.99	17	142	4.17	400	.0266	-----	-----	-----	-----	-----	A+
26	6,000	24,000	6.40	8	137	3.30	-----	-----	-----	-----	-----	-----	-----	
			6.40	8	137	3.30	475	0.0130	812	699	0.742	0.89	1.06	N
			12.98	113	255	10.14	500	.0137	836	523	.528	.85	.94	A
			12.98	112	255	10.14	590	.0162	-----	-----	-----	-----	-----	A+
28	10,000	18,500	11.89	79	230	8.88	400	0.0125	711	632	0.693	0.70	0.82	E-
			11.89	80	230	8.88	435	.0136	591	511	.518	.67	.74	E
			11.89	80	230	8.88	468	.0152	-----	-----	-----	-----	-----	A+
29	8,000	21,000	8.70	40	199	6.20	335	0.0153	-----	-----	-----	-----	-----	
			8.70	40	199	6.20	350	.0160	-----	-----	-----	-----	-----	A
30	6,000	16,000	9.67	22	144	5.17	396	0.0213	1171	1149	0.767	0.38	0.52	A+
			9.67	21	144	5.17	525	.0282	1374	1353	.707	.42	.60	N
			9.67	22	144	5.17	590	.0317	-----	-----	-----	-----	-----	A+
31	17,500	32,000	13.31	268	261	8.41	570	0.0189	1447	1182	0.912	0.84	1.09	B
			13.31	310	207	7.92	500	0.0175	1490	1180	0.974	0.80	0.76	N
32	19,000	30,000	16.60	310	261	9.29	390	0.0114	-----	-----	-----	-----	-----	
33	12,000	24,000	11.40	103	261	9.29	415	0.0124	-----	-----	-----	-----	-----	
			11.40	103	261	9.29	450	.0179	1378	1117	0.899	0.63	0.80	E
34	17,500	34,000	11.89	261	241	6.98	450	0.0179	1378	1117	0.899	0.63	0.80	B-
			11.89	56	196	7.49	410	0.0152	927	871	0.794	0.53	0.70	B-
35	8,000	15,500	11.21	58	198	7.50	429	0.0159	971	913	.800	.65	.73	B-
			11.21	58	198	7.50	510	.0189	-----	-----	-----	-----	-----	A+
36	17,500	36,000	10.19	260	261	6.50	316	0.0135	938	678	0.708	0.53	0.59	E
			10.19	260	261	6.50	350	.0150	837	577	.546	.54	.57	E
			10.17	260	263	6.50	400	.0171	-----	-----	-----	-----	-----	A

The various types of resonant combustion are designated as follows:

A Rapid flickering at base of flame.

B Temperature fluctuations at combustor outlet.

C Noisy vibration of combustor and adjacent ducting.

D Combination of B and C.

E Combination of A and B.

F Normal operation (no noticeable resonance).

+ Severe.

- Slight.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE II - PERFORMANCE DATA ON COMBUSTOR FROM INVESTIGATION TO

Point	Simulated engine speed (rpm)	Simulated altitude (ft)	Combustor-inlet static pressure (lb/sq in. absolute)	Combustor-inlet temperature (°F)	Combustor-inlet velocity (ft/sec)	Air flow (lb/sec)	Fuel flow (lb/hr)
1	10,000	16,600	13.20	88	229	9.63	425
			13.20	88	229	9.63	450
			13.20	88	229	9.63	480
3	10,000	23,000	9.50	65	240	7.58	320
			9.50	65	240	7.58	370
8	18,000	30,000	14.70	274	233	8.19	670
			14.70	274	233	8.19	600
10	16,000	32,000	11.20	205	269	7.95	300
			11.20	205	267	7.93	358
			11.20	205	269	7.95	400
11	16,500	30,000	12.90	224	266	8.79	401
			12.90	223	266	8.79	472
			12.90	225	266	8.79	500
13	14,000	20,000	16.39	162	264	12.20	640
			16.40	162	264	12.20	770
14	14,000	24,000	13.38	154	272	10.61	450
			13.71	155	270	10.60	480
17	12,000	17,000	15.09	125	256	11.63	503
			15.09	124	256	11.63	600
18	12,000	19,000	14.18	120	256	11.00	413
			14.18	120	256	11.00	442
			14.18	120	256	11.00	465
20	15,500	28,000	13.12	191	263	9.29	460
			13.09	191	263	9.29	490
21	8,000	17,000	10.41	50	198	7.08	355
			10.41	50	199	7.15	406
23	14,000	26,000	12.38	155	275	9.74	380
			12.38	155	275	9.74	405
			12.38	152	277	9.74	440
25	6,000	20,000	7.99	11	141	4.20	255
			7.99	11	141	4.20	295
			7.99	11	141	4.20	350
30	6,000	16,000	9.88	23	145	5.20	360
			9.88	22	145	5.20	470
			9.88	22	145	5.20	550
31	17,500	32,000	13.32	264	260	8.40	515
			13.32	265	261	8.40	605
33	12,000	24,000	11.40	103	261	9.30	365
			11.40	103	263	9.31	386
			11.40	103	261	9.30	423
34	17,500	34,000	11.90	260	241	7.00	448
			11.90	260	241	7.00	498
35	8,000	15,600	11.19	58	198	7.50	360
			11.19	58	198	7.49	410
			11.19	58	198	7.50	415
37	16,000	25,000	15.80	203	258	10.77	605
			15.80	202	258	10.77	658
39	8,000	14,000	11.99	51	194	7.97	465
			11.99	52	194	7.97	496
40	8,000	13,000	12.51	53	194	8.29	525
			12.60	52	194	8.30	550
42	17,000	28,000	15.10	240	246	9.31	550
			15.11	240	246	9.32	675
43	16,500	34,000	10.70	226	269	7.30	345
			10.70	225	269	7.30	400
45	6,000	13,000	10.69	31	144	5.50	400
			10.67	30	144	5.50	463
			10.68	29	144	5.60	525

The various types of resonant combustion are designated as follows:

- A Rapid flickering at base of flame.
- B Temperature fluctuations at combustor outlet.
- C Noisy vibration of combustor and adjacent ducting.
- D Combination of B and C.
- E Combination of A and B.
- F Normal operation (no noticeable resonance).
- + Severe.
- Slight.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

DETERMINE ALTITUDE OPERATIONAL LIMITS WITH AN-F-28, AMENDMENT-3, FUEL

Fuel-air ratio	Mean combustor outlet temperature (°F)	Mean temperature rise through combustor (°F)	Ratio of actual to theoretical temperature rise	Total-pressure drop through combustor (lb/sq in.)	Static-pressure drop through combustor (lb/sq in.)	Type of resonance (1)
0.0123	755	668	0.751	0.80	0.84	N
.0130	780	692	.740	.84	.97	B-
.0138	-----			Blow-out		A+
0.0117	-----	Outlet temperatures below 400° F				A+
.0136	-----			Blow-out		A+
0.0193	1510	1236	0.945	0.73	0.96	N
.0204	1541	1267	.921	.74	.99	N
0.0103	632	427	0.562	0.68	0.69	E-
.0129	624	421	.460	.67	.67	A+
.014	-----			Blow-out		A+
0.0127	916	692	0.767	0.78	0.88	A-
.0149	1028	805	.772	.82	.96	N
.0168	-----			Blow-out		A+
0.0146	1042	880	0.866	1.15	1.45	N
.0175	-----			Blow-out		A+
0.0118	573	419	0.494	0.89	0.92	A+
.0126	-----			Blow-out		A+
0.0120	829	704	0.812	1.02	1.22	N
.0143	949	825	.811	1.05	1.32	N
0.0104	675	555	0.730	0.95	1.06	N
.0112	710	590	.725	.97	1.10	A-
.0117	-----			Blow-out		A+
0.0138	916	725	0.744	0.82	0.95	A-
.0147	-----			Blow-out		A+
0.0139	537	487	0.488	0.45	0.49	A-
.0158	-----			Blow-out		A+
0.0108	-----	Outlet temperatures below 400° F				A-
.0116	520	368	0.441	0.81	0.81	A+
.0125	-----			Blow-out		A+
0.0169	654	643	0.535	0.27	0.32	E+
.0195	751	740	.541	.30	.36	E+
.0231	-----			Blow-out		-
0.0192	1055	1032	0.766	0.35	0.47	E-
.0251	1293	1271	.746	.39	.55	E-
.0294	-----			Blow-out		-
0.0170	1288	1024	0.877	0.78	0.87	N
.0200	1424	1169	.865	.80	1.05	N
0.0109	-----	Outlet temperatures below 400° F				A-
.0115	-----	Outlet temperatures below 400° F				A+
.0126	-----			Blow-out		A+
0.0178	1541	1081	0.889	0.61	0.77	N
.0198	1457	1197	.893	.63	.83	N
0.0133	554	496	0.518	0.50	0.55	A+
.0152	-----			Blow-out		A+
.0154	-----			Blow-out		A+
0.0166	1198	995	0.915	1.00	1.28	N
.0170	1278	1076	.915	1.08	1.34	E-
0.0162	826	875	0.732	0.63	0.81	E-
.0173	-----			Blow-out		-
0.0176	1056	1003	0.810	0.39	0.92	E-
.0184	-----			Blow-out		A
0.0164	1297	1057	0.933	0.84	1.06	B-
.0201	1486	1246	.914	-----	1.18	D-
0.0130	508	383	0.415	0.67	0.68	E
.0151	-----			Blow-out		E+
0.0202	1162	1131	0.802	0.39	0.53	A-
.0234	1281	1251	.779	.43	.59	E
.0265	1499	1470	.824	.41	.62	E

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE III - TEMPERATURES OF THREE FUEL NOZZLES IN COMBUSTOR

Inlet static pressure (lb/sq in. absolute)	Inlet temperature (°F)	Inlet velocity (ft/sec)	Air flow (lb/sec)	Fuel flow (lb/hr)	Fuel-air ratio	Fuel-manifold pressure differential (lb/sq in.)	Temperature (°F)		
							Position of nozzle (arranged counter-clockwise, looking upstream)		
							187.5°	97.5°	22.5°
10.67	72	217	7.64	446	0.0162	8.35	78	87	79
10.67	72	217	7.64	479	.0174	9.53	78	78	72
13.41	127	217	8.71	280	.0089	8.59	121	179	141
13.41	127	218	8.73	343	.0109	12.28	120	169	152
13.41	172	215	8.00	258	.0089	7.56	150	190	150
13.41	172	215	8.00	315	.0109	11.00	163	173	170
16.01	289	260	9.73	384	.0110	9.01	230	210	268
15.98	290	260	9.73	453	.0129	12.47	230	200	238
15.98	287	259	9.71	523	.0150	14.34	230	192	248
15.98	290	260	9.71	595	.0170	17.19	230	185	245
15.98	339	259	9.09	360	.0110	9.67	266	229	472
15.98	339	259	9.09	426	.0130	12.08	265	162	496
15.98	340	259	9.07	458	.0140	13.45	265	159	424
15.98	340	259	9.09	491	.0150	15.59	265	156	407

National Advisory Committee
for Aeronautics

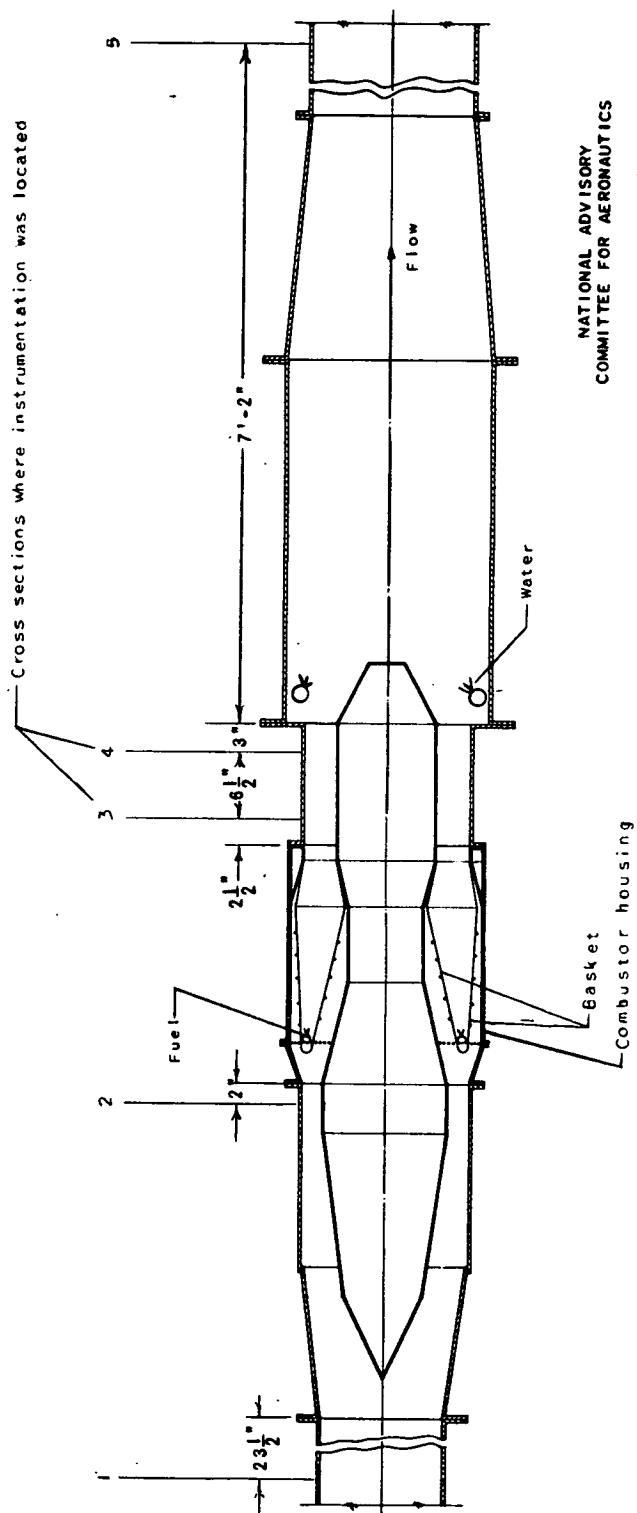


Figure 1. - Diagrammatic sketch of combustor showing inlet and outlet ducts and locations of instruments.

Fig. 2

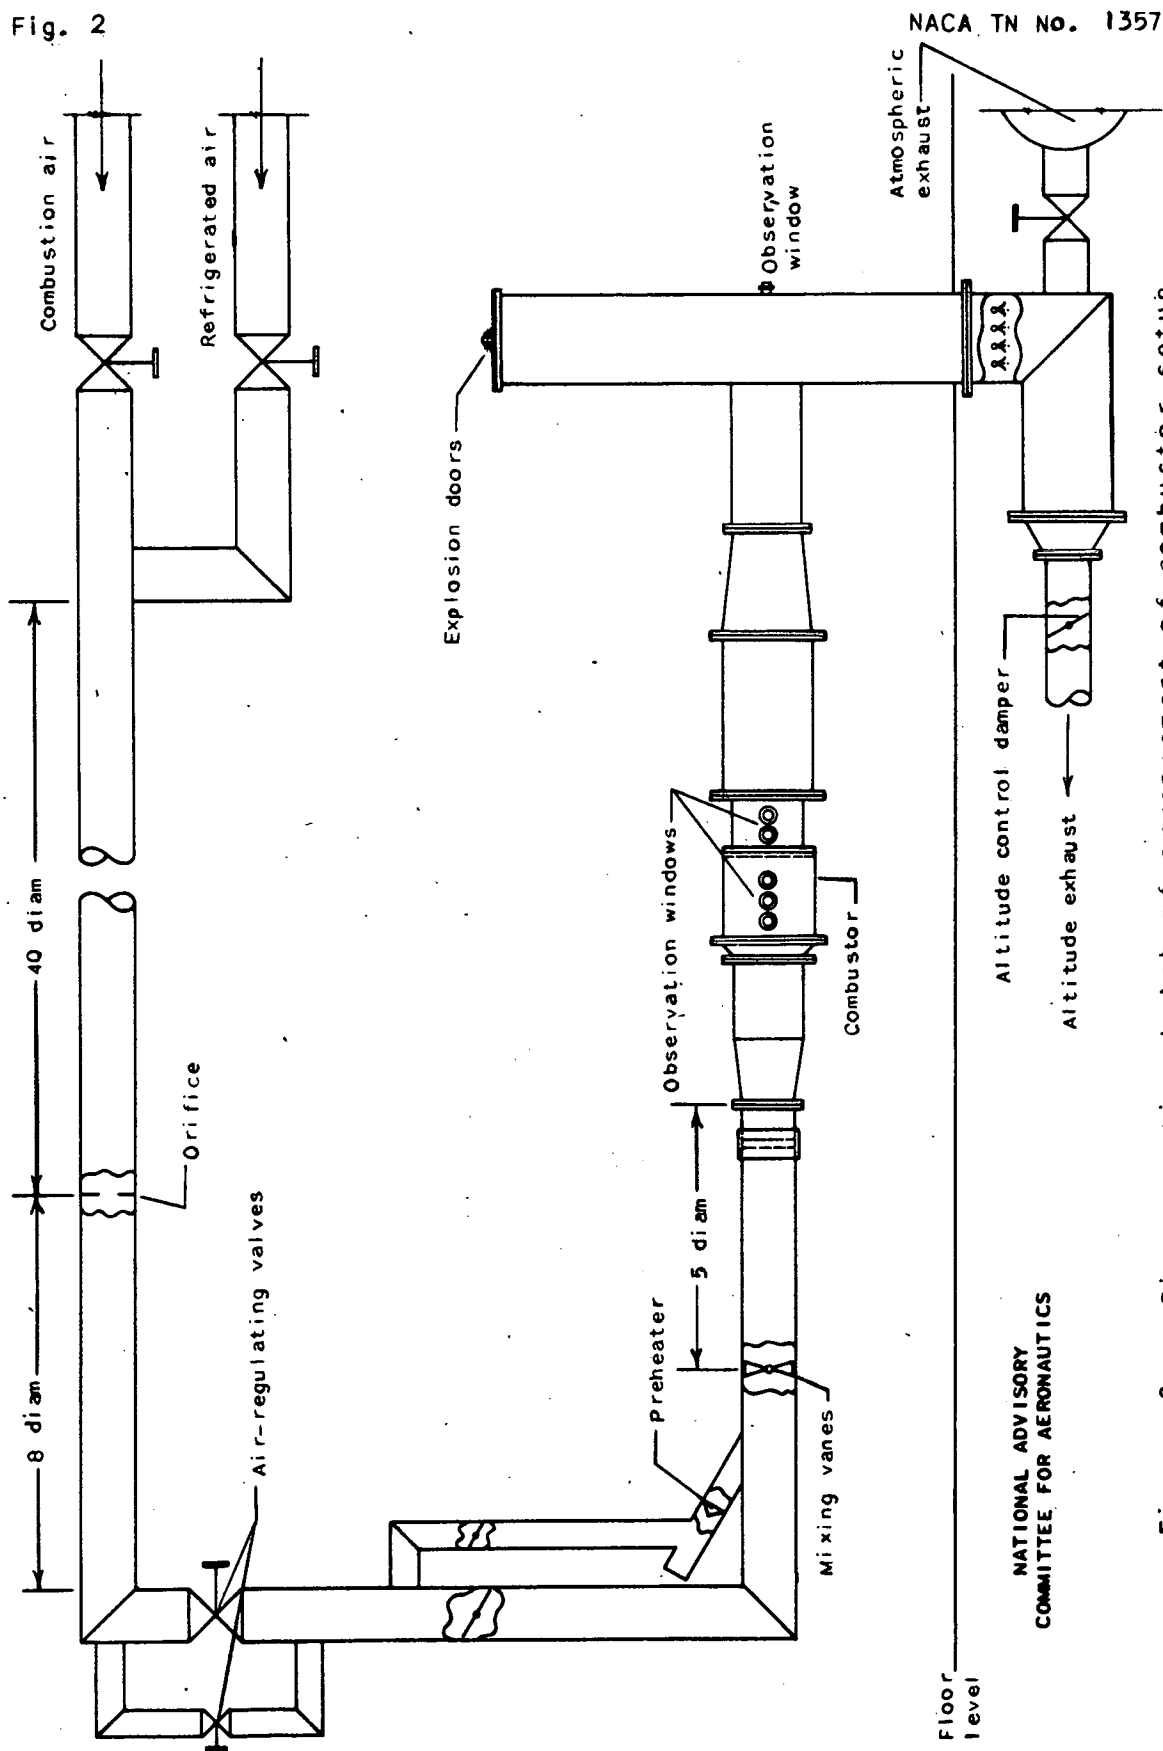


Figure 2. - Diagrammatic sketch of arrangement of combustor setup.



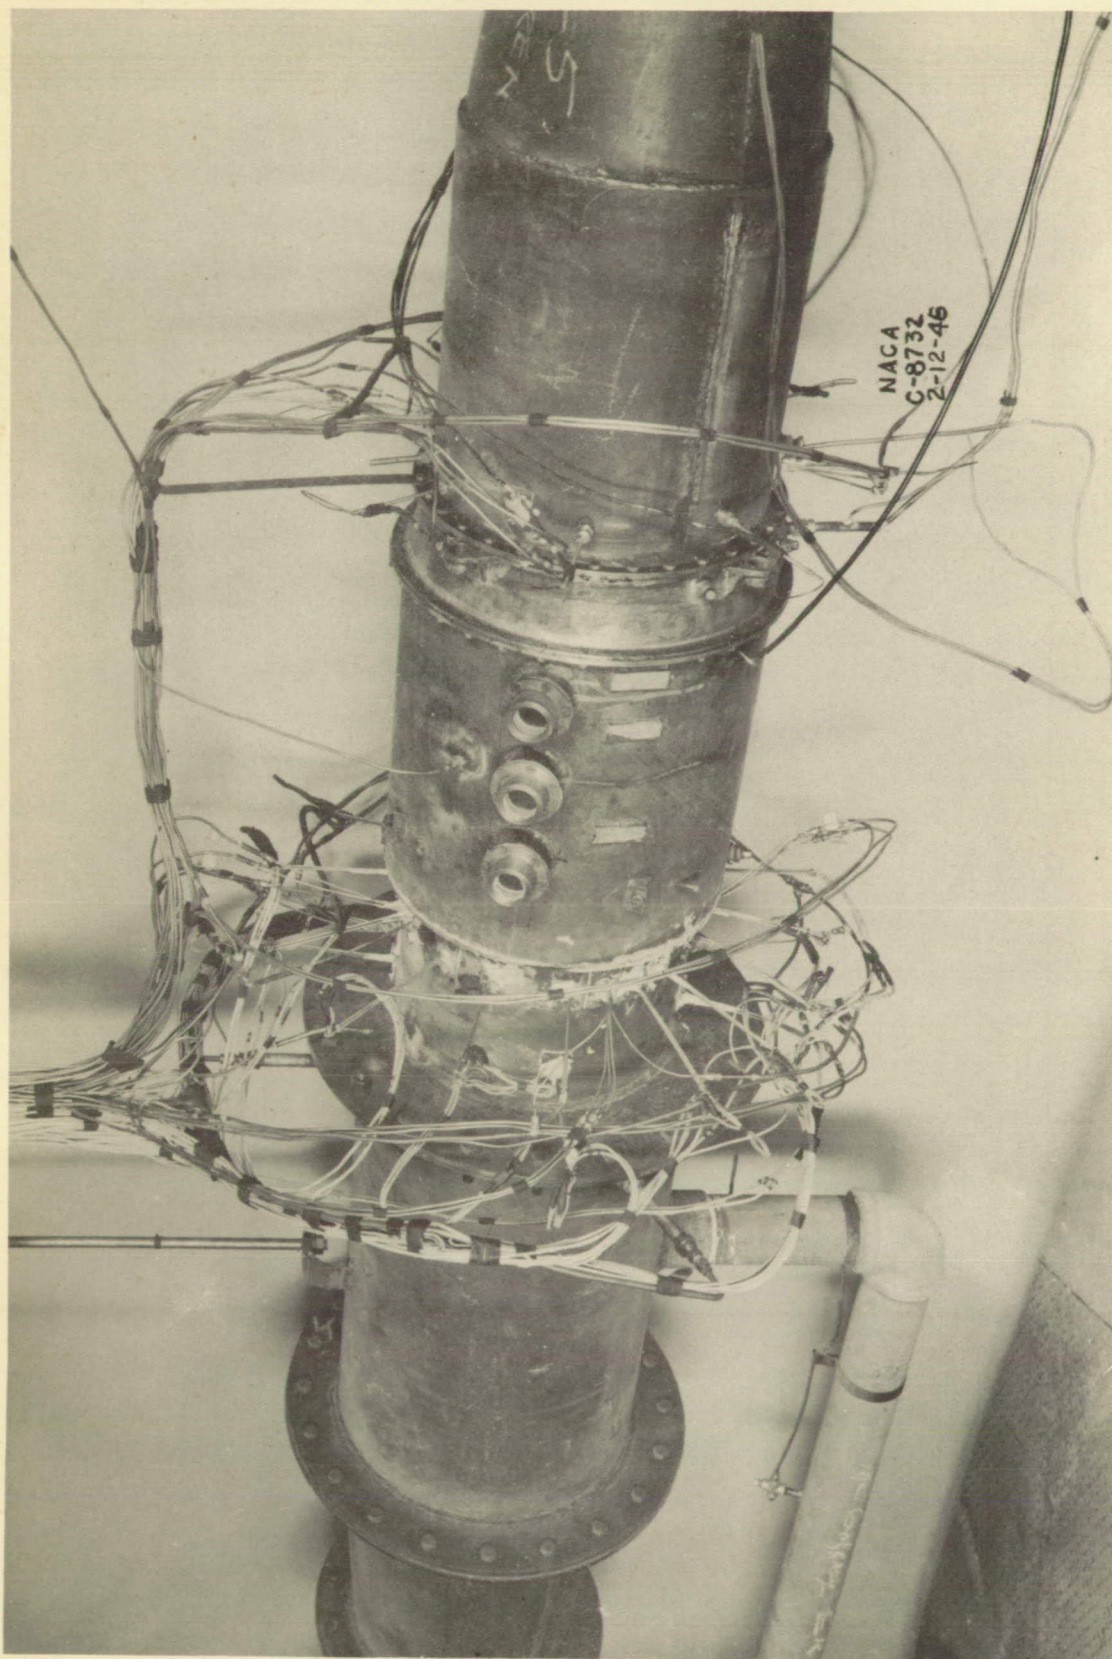








Figure 3. - Side view of combustor assembly.

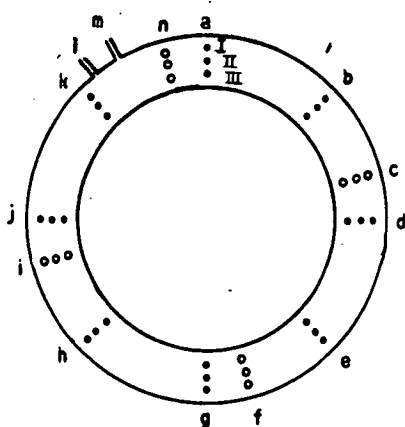

Cross section 2

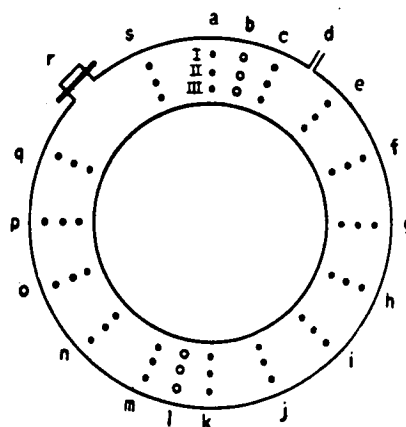


Cross section 3

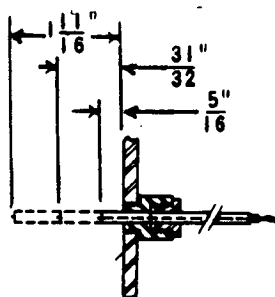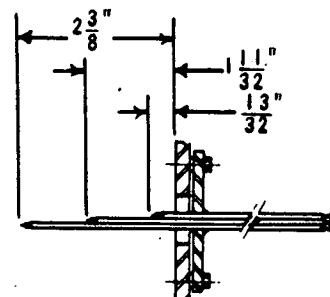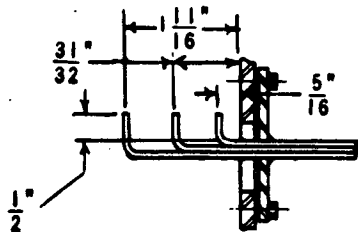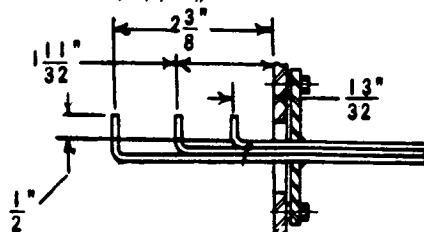Traversing thermocouple
used at positions 2a, b,
d, e, g, h, j, and kThermocouple rake used
at positions 3a, c, e,
f, g, h, i, j, k, m, n,
o, p, q, and sTotal-pressure rake
used at positions
2c, f, i, and nTotal-pressure rake used
at positions 3b and lStatic-pressure tap used at
positions 2l and mStatic-pressure tap used
at position 3dNATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS



- Thermocouple
- o Total-pressure tap

(a) Cross sections 2 and 3.


Figure 4. - Details of temperature- and pressure-measuring instruments and positions in various cross sections of inlet and outlet ducts. (Cross sections shown in fig. 1.)

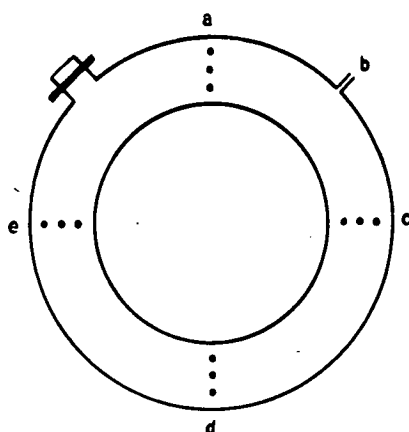

Cross section 4

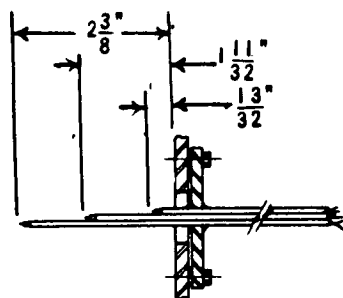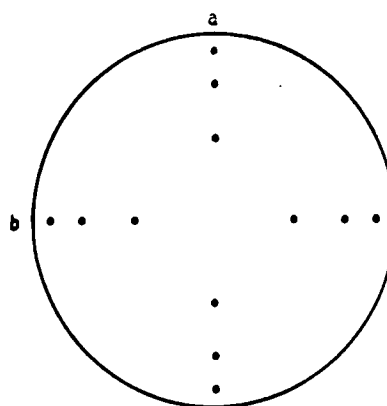Thermocouple rake used
at positions 4a, c, d
and e

Cross section 5

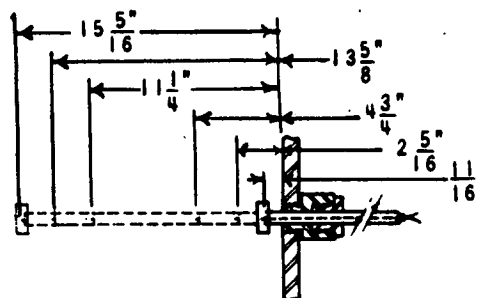
Traversing thermocouple used
at positions 5a and bStatic-pressure tap used
at position 4b

- Thermocouple
- Total-pressure tap

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

(b) Cross sections 4 and 5.

Figure 4. - Concluded. Details of temperature- and pressure-measuring instruments and positions in various cross sections of inlet and outlet ducts. (Cross sections shown in fig. 1.)


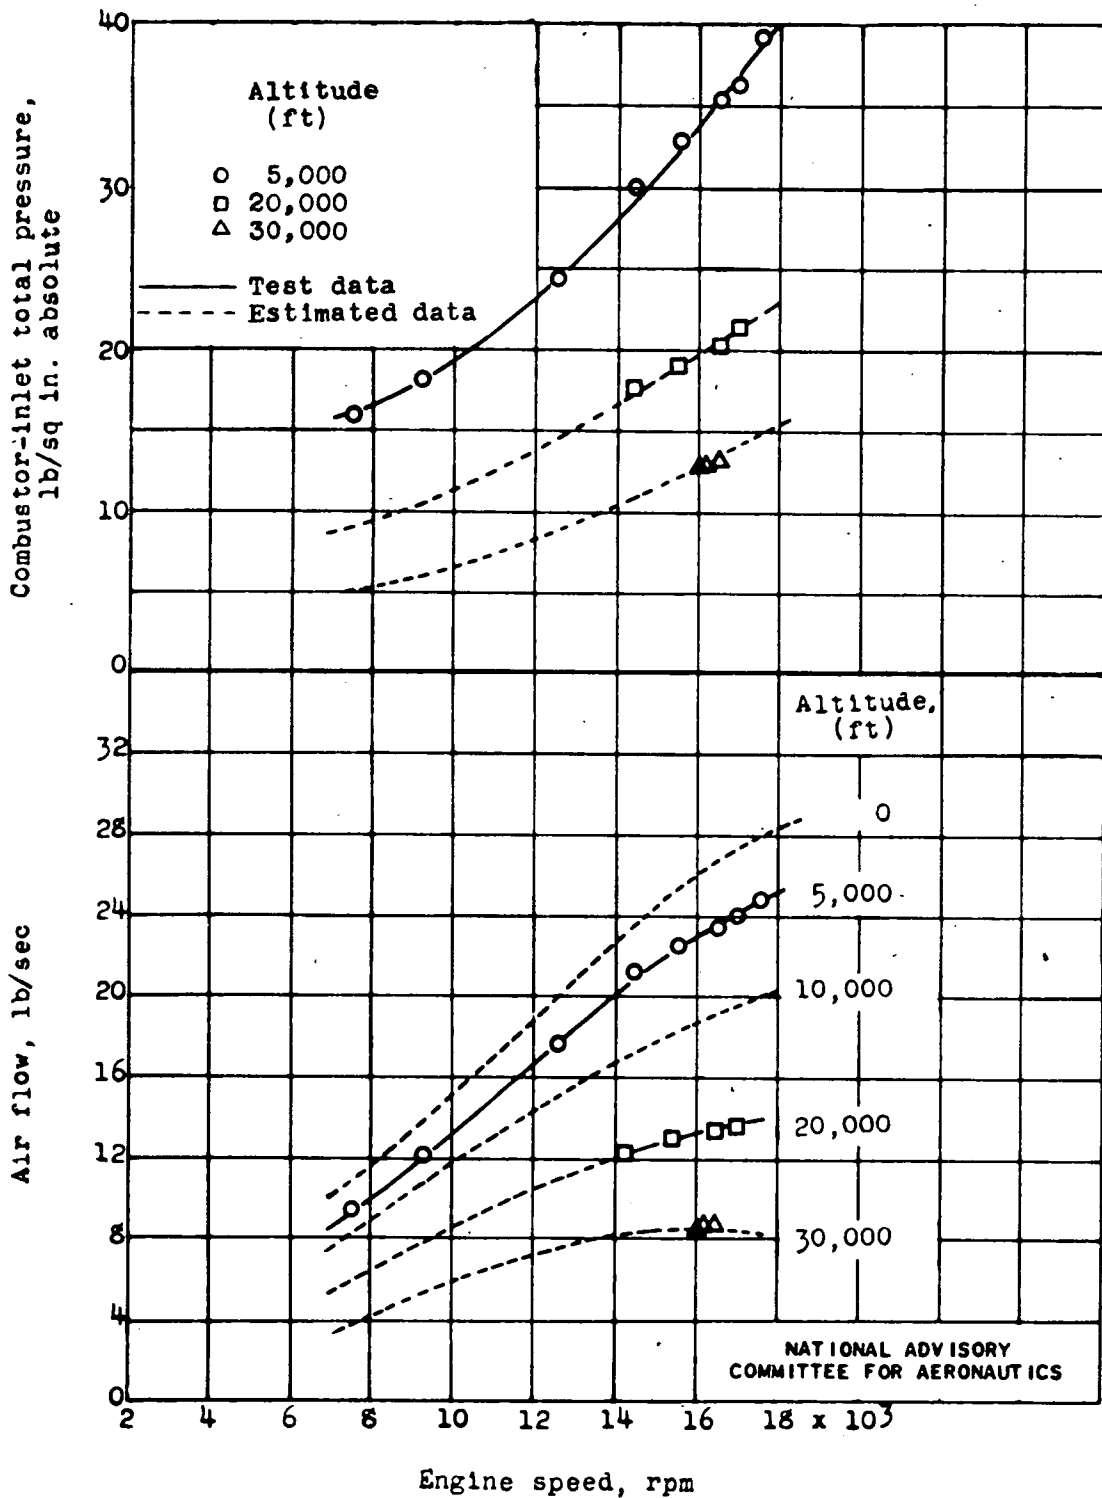


(a) Combustor-inlet total pressure and air flow for various altitudes and engine speeds.

Figure 5. - Engine conditions used in investigation of combustor. Static engine operation; tail cone retracted. (Data from Bureau of Aeronautics, Navy Department.)


Fig. 5b

NACA TN No. 1357

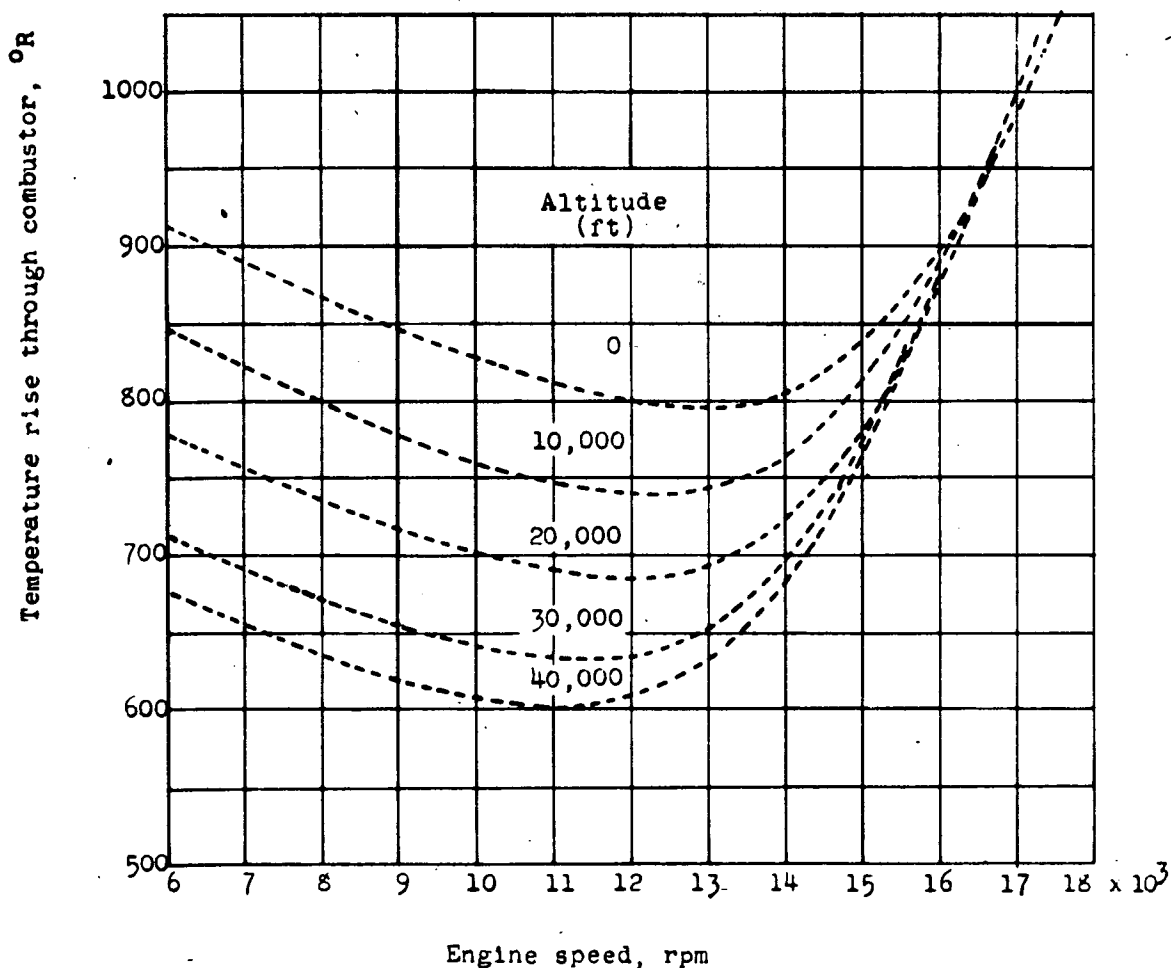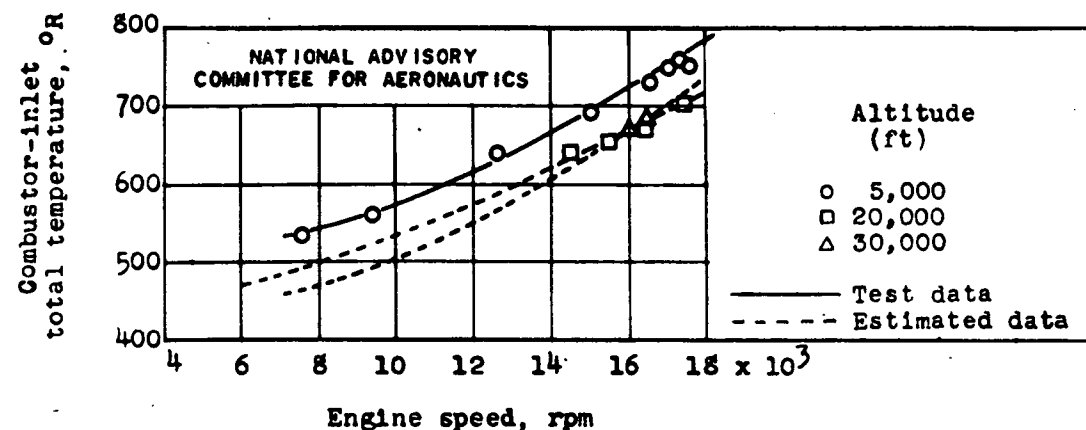

(b) Combustor-inlet total temperature and temperature rise through combustor for various altitudes and engine speeds.

Figure 5. - Concluded. Engine conditions used in investigation of combustor. Static engine operation; tail cone retracted. (Data from Bureau of Aeronautics, Navy Department.)

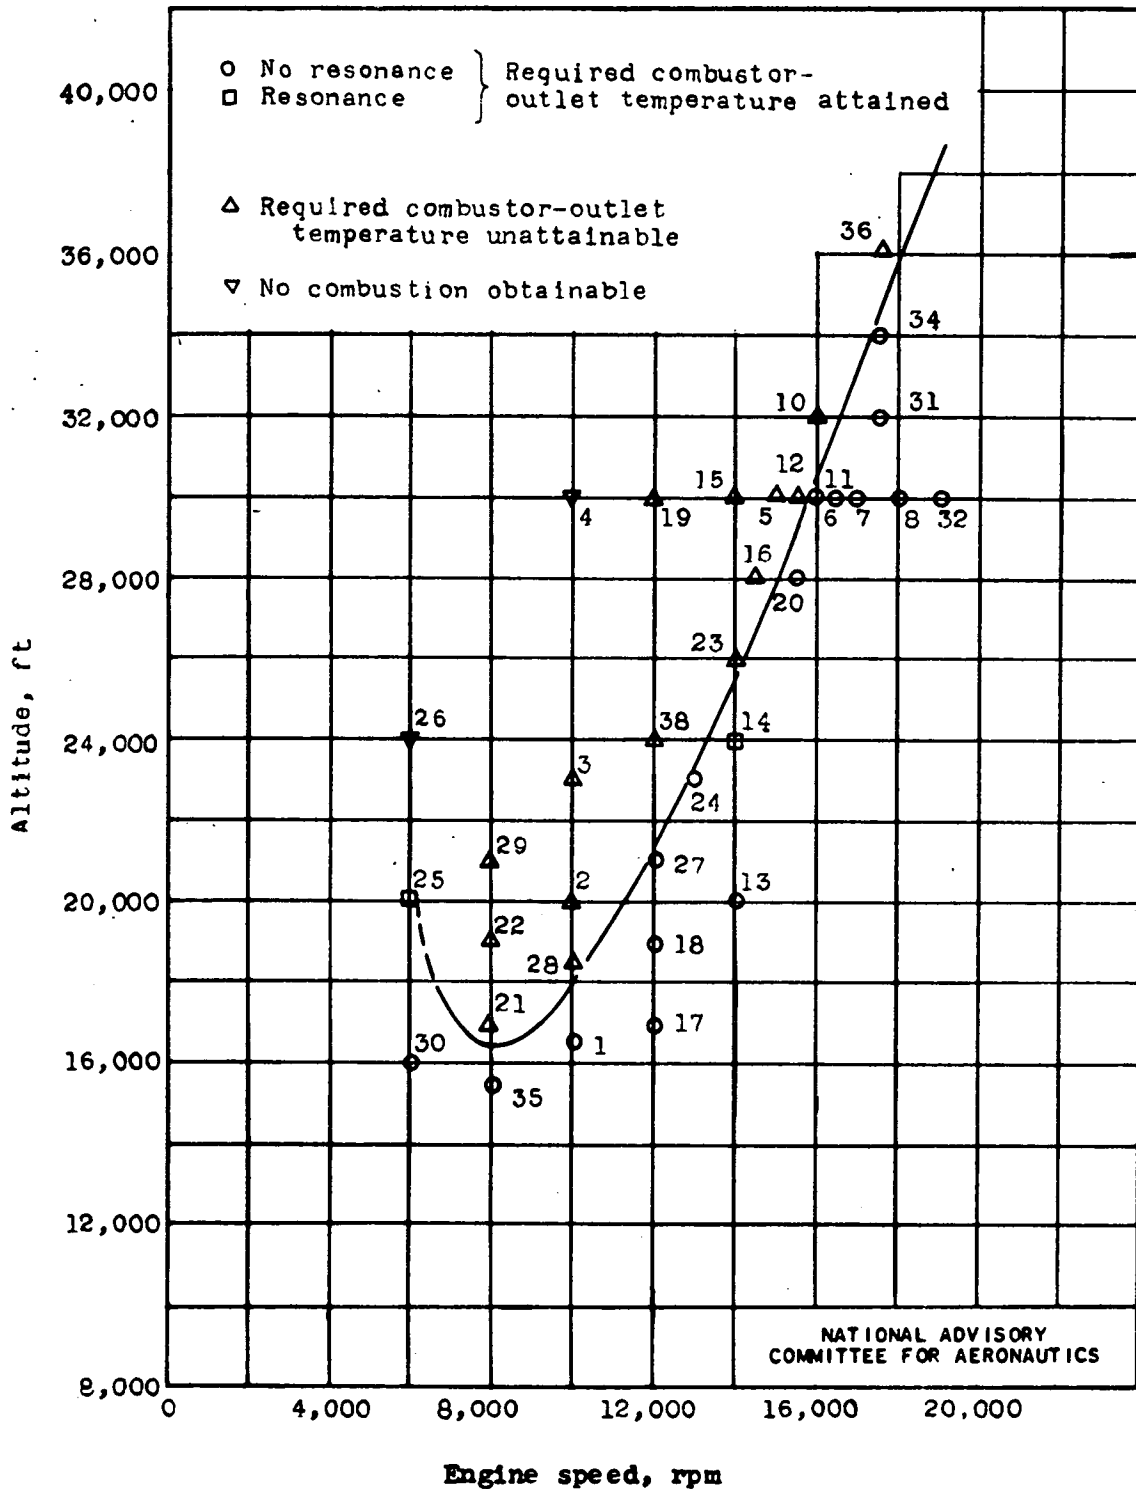


(a) Fuel, AN-F-22.

Figure 6. - Altitude operational limits of combustor under conditions simulating static operation of engine with tail cone retracted. (Point numbers listed in table I.)

Fig. 6b

NACA TN No. 1357

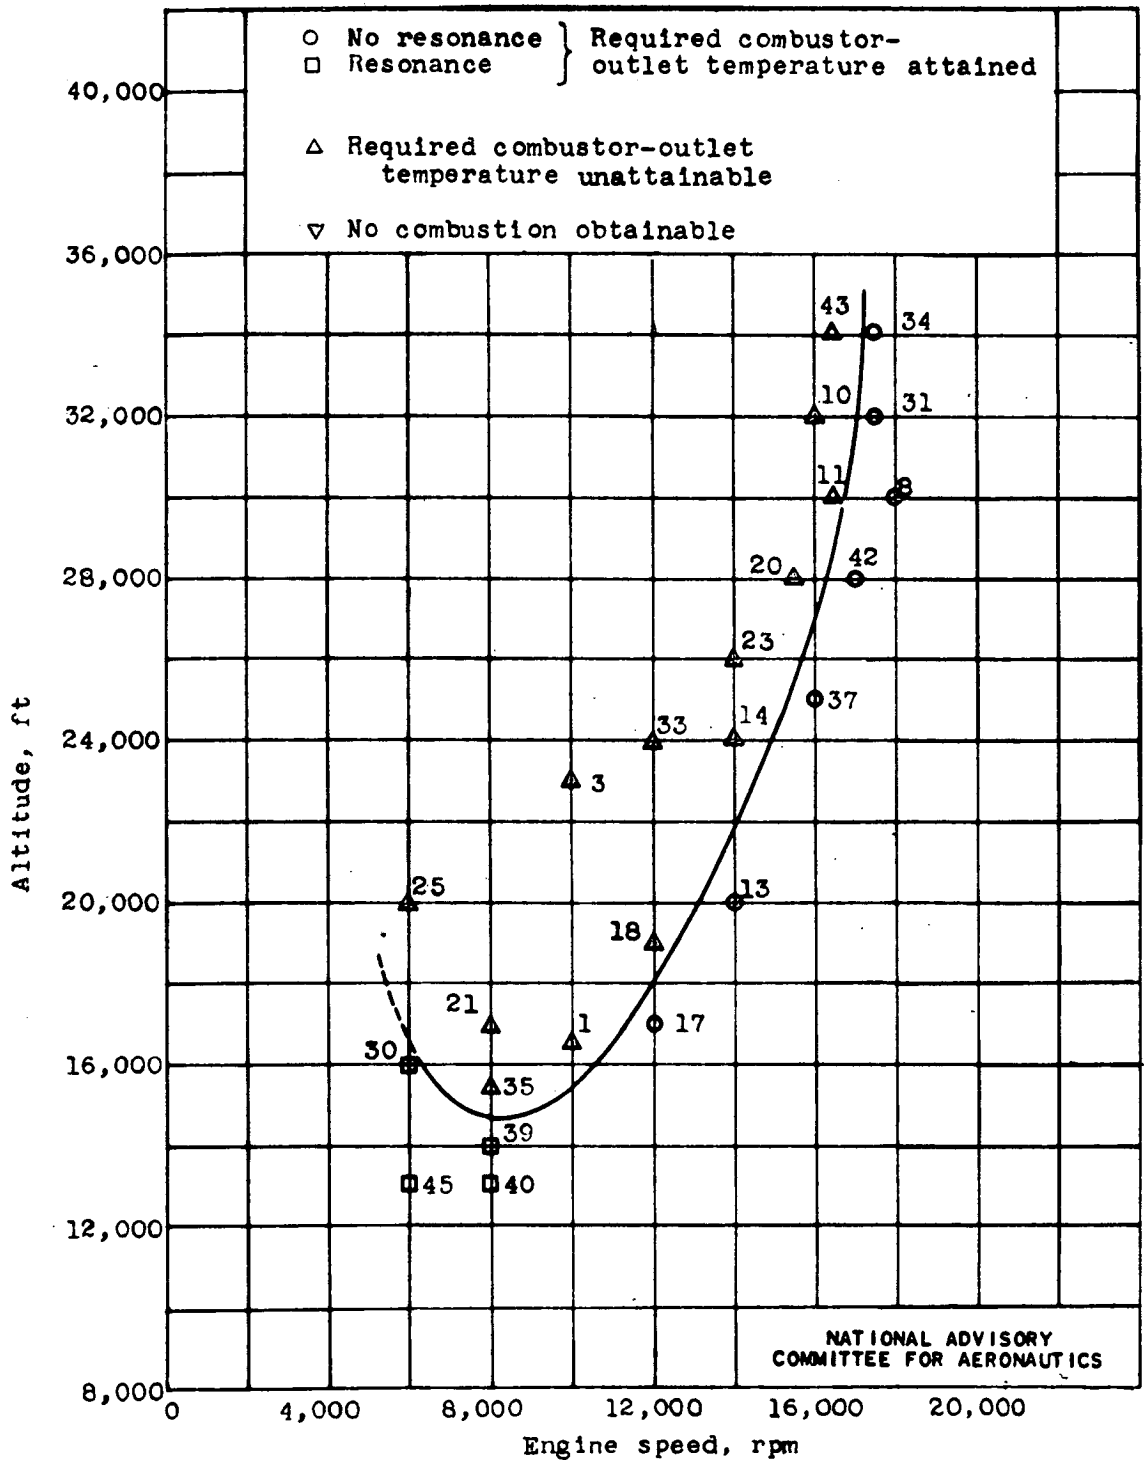

(b) Fuel: AN-F-28, Amendment-3.

Figure 6. - Concluded. Altitude operational limits of combustor under conditions simulating static operation of engine with tail cone retracted. (Point numbers listed in table II.)



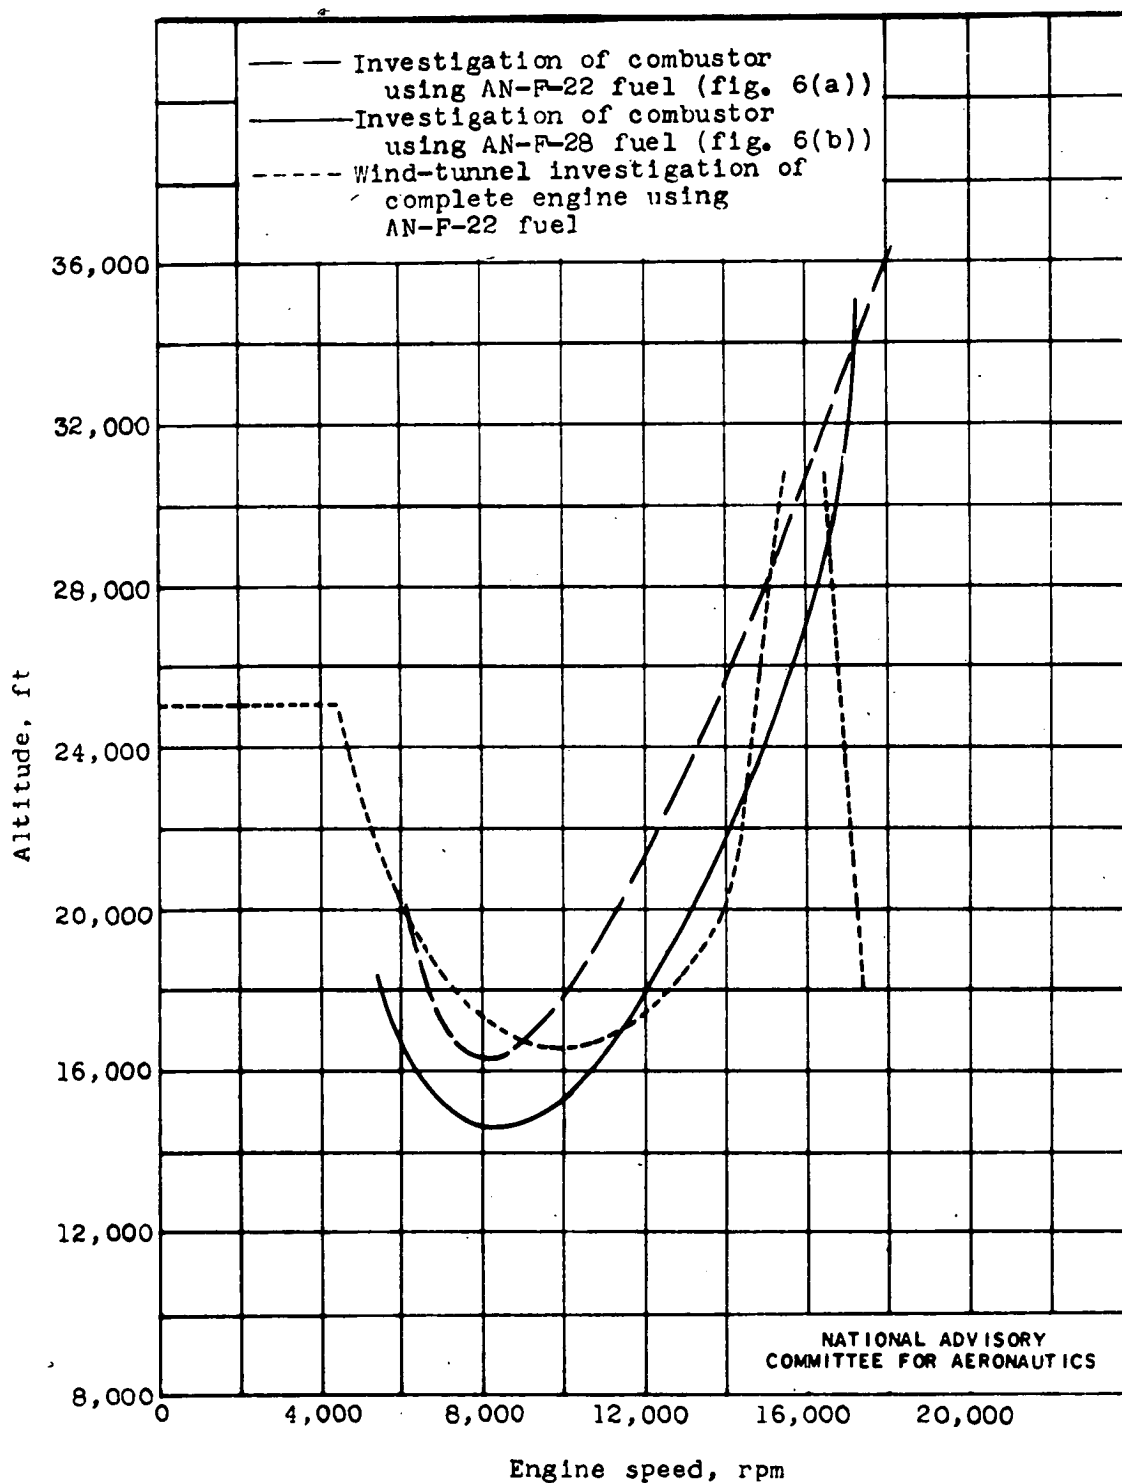


Figure 7. - Comparison of altitude operational limits of jet-propulsion engine as determined by wind-tunnel investigation of the complete engine using AN-F-22 fuel and by investigations on combustor operating with AN-F-22 and AN-F-28 fuels.

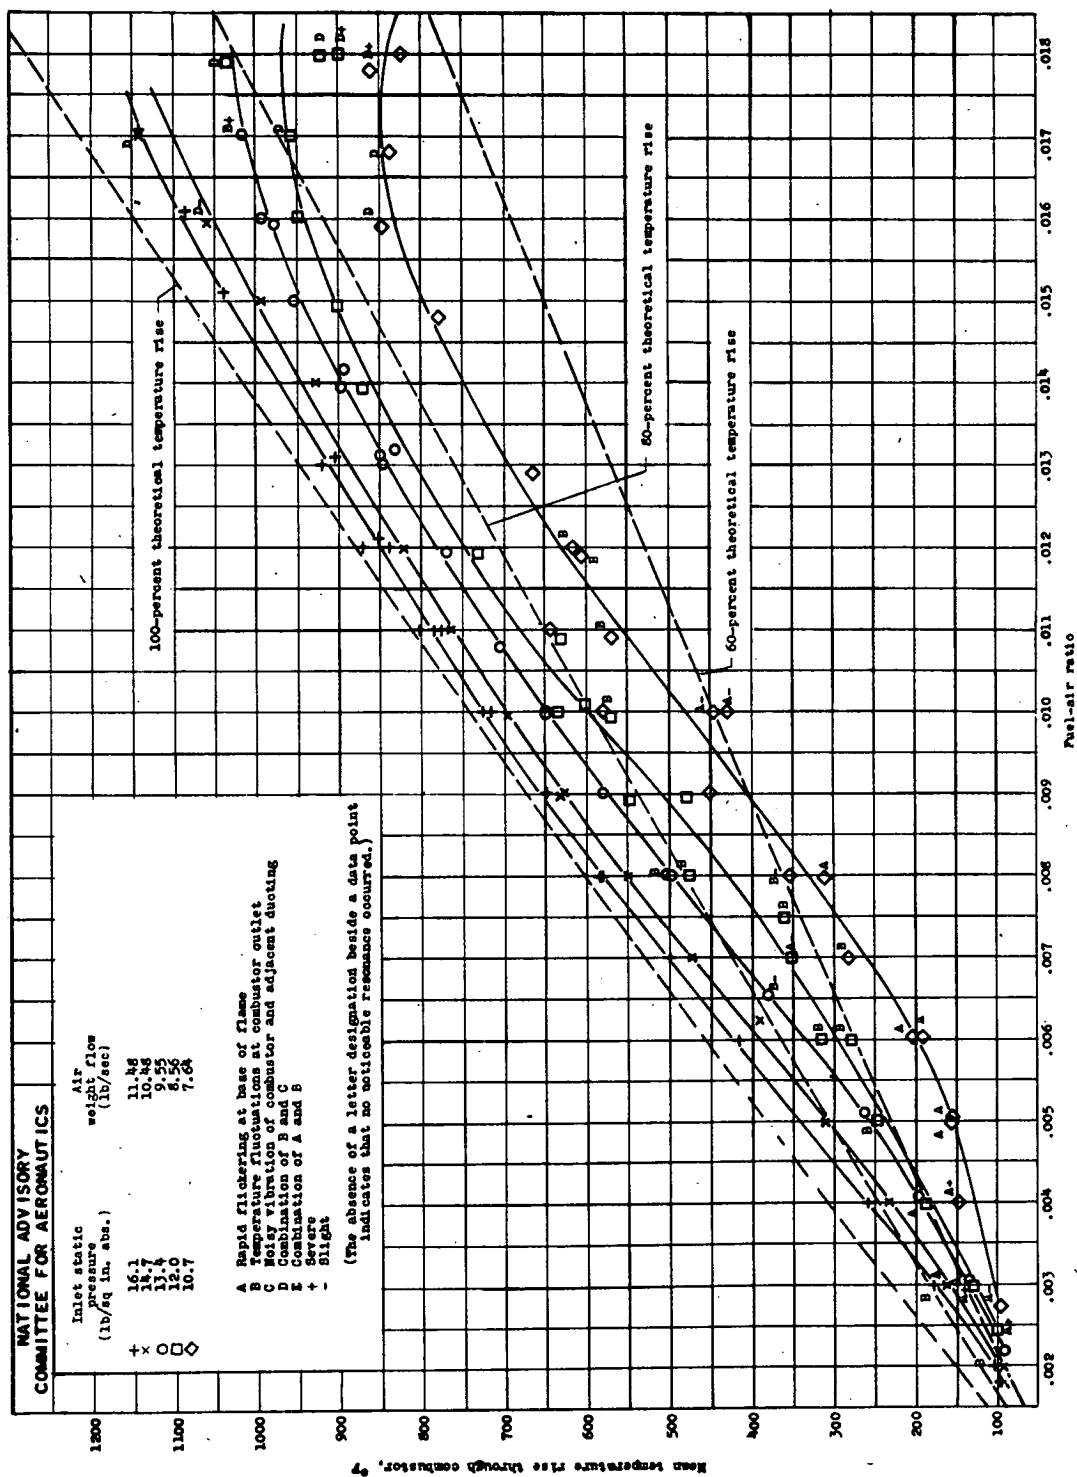


(a) Effect of altering static pressure at combustor inlet. Inlet temperature, 650° F; inlet velocity, 214 feet per second.

Figure 8. - Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 10,000 rpm and an altitude of 16,000 feet.

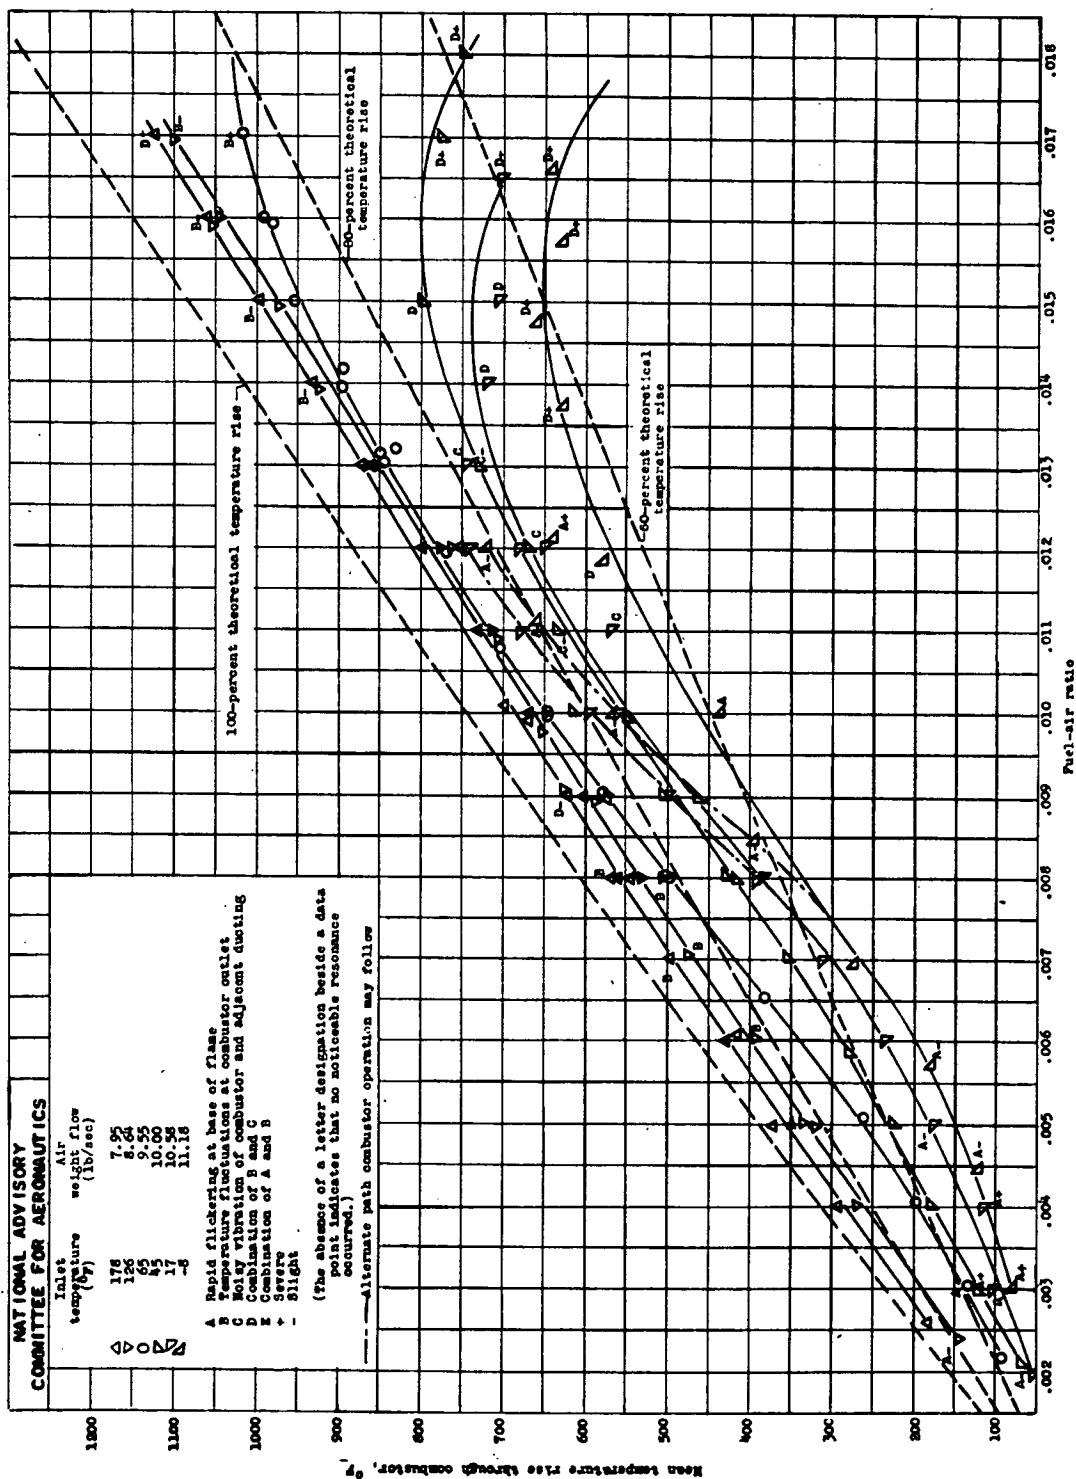


(b) Effect of altering temperature at combustor inlet. Inlet static pressure, 13.4 pounds per square inch absolute; inlet velocity, 215 feet per second.

Figure 6. - Continued. Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 10,000 rpm and an altitude of 16,600 feet.

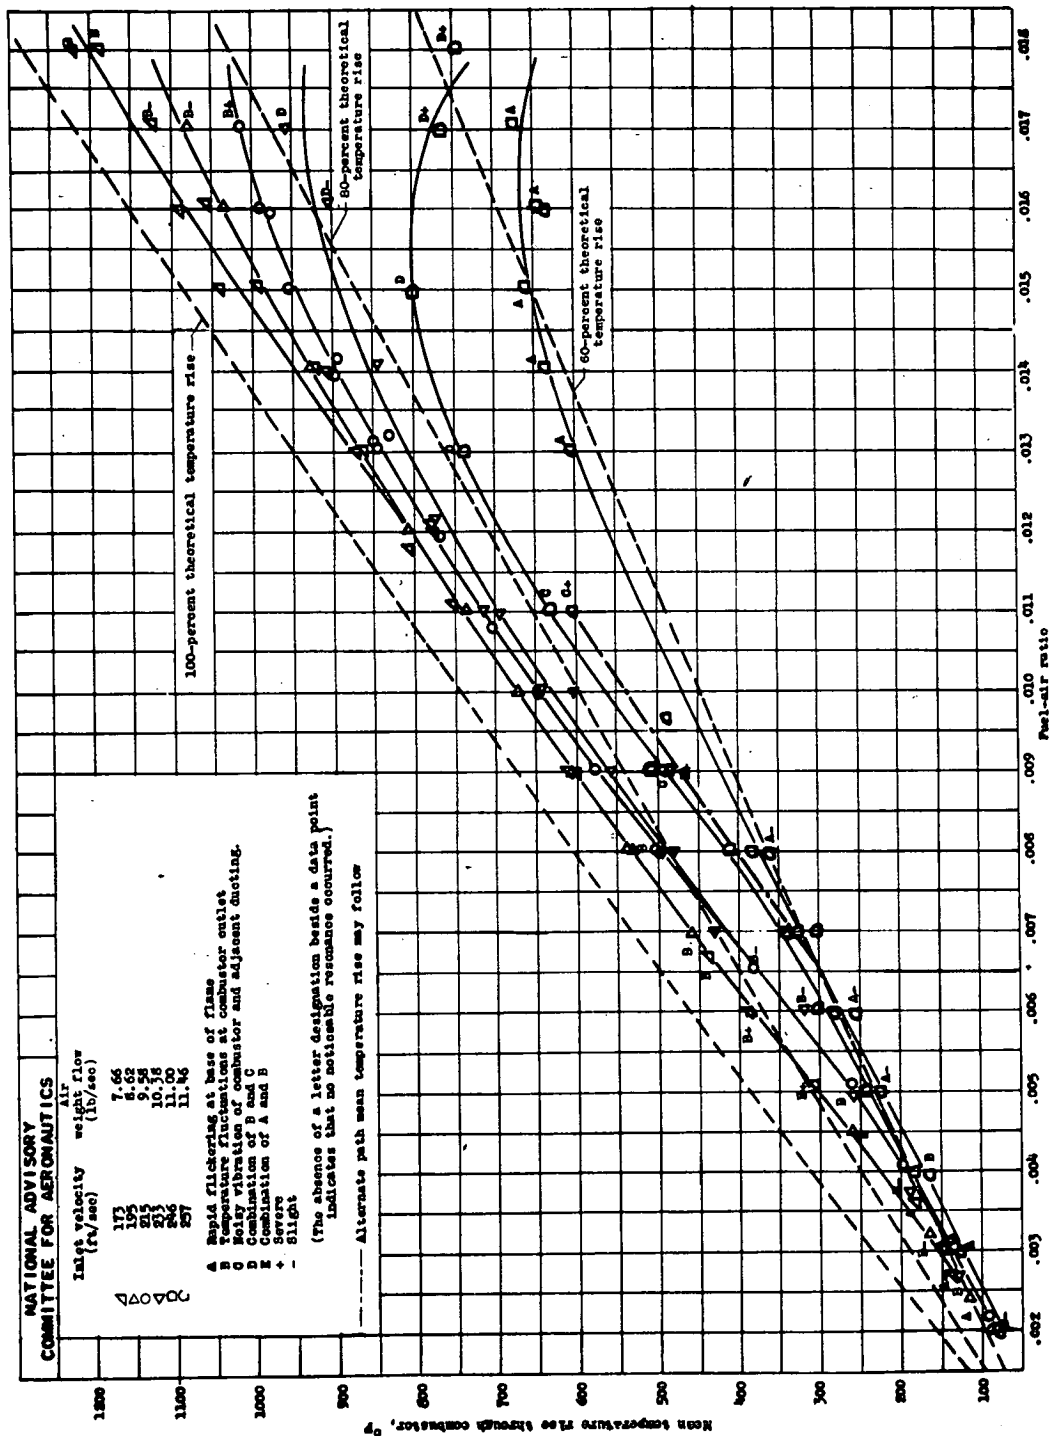


(c) Effect of altering velocity at combustor inlet. Inlet temperature, 660 F; inlet static pressure, 13.4 pounds per square inch absolute.

Figure 8. - Concluded. Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 10,000 rpm and an altitude of 16,600 feet.

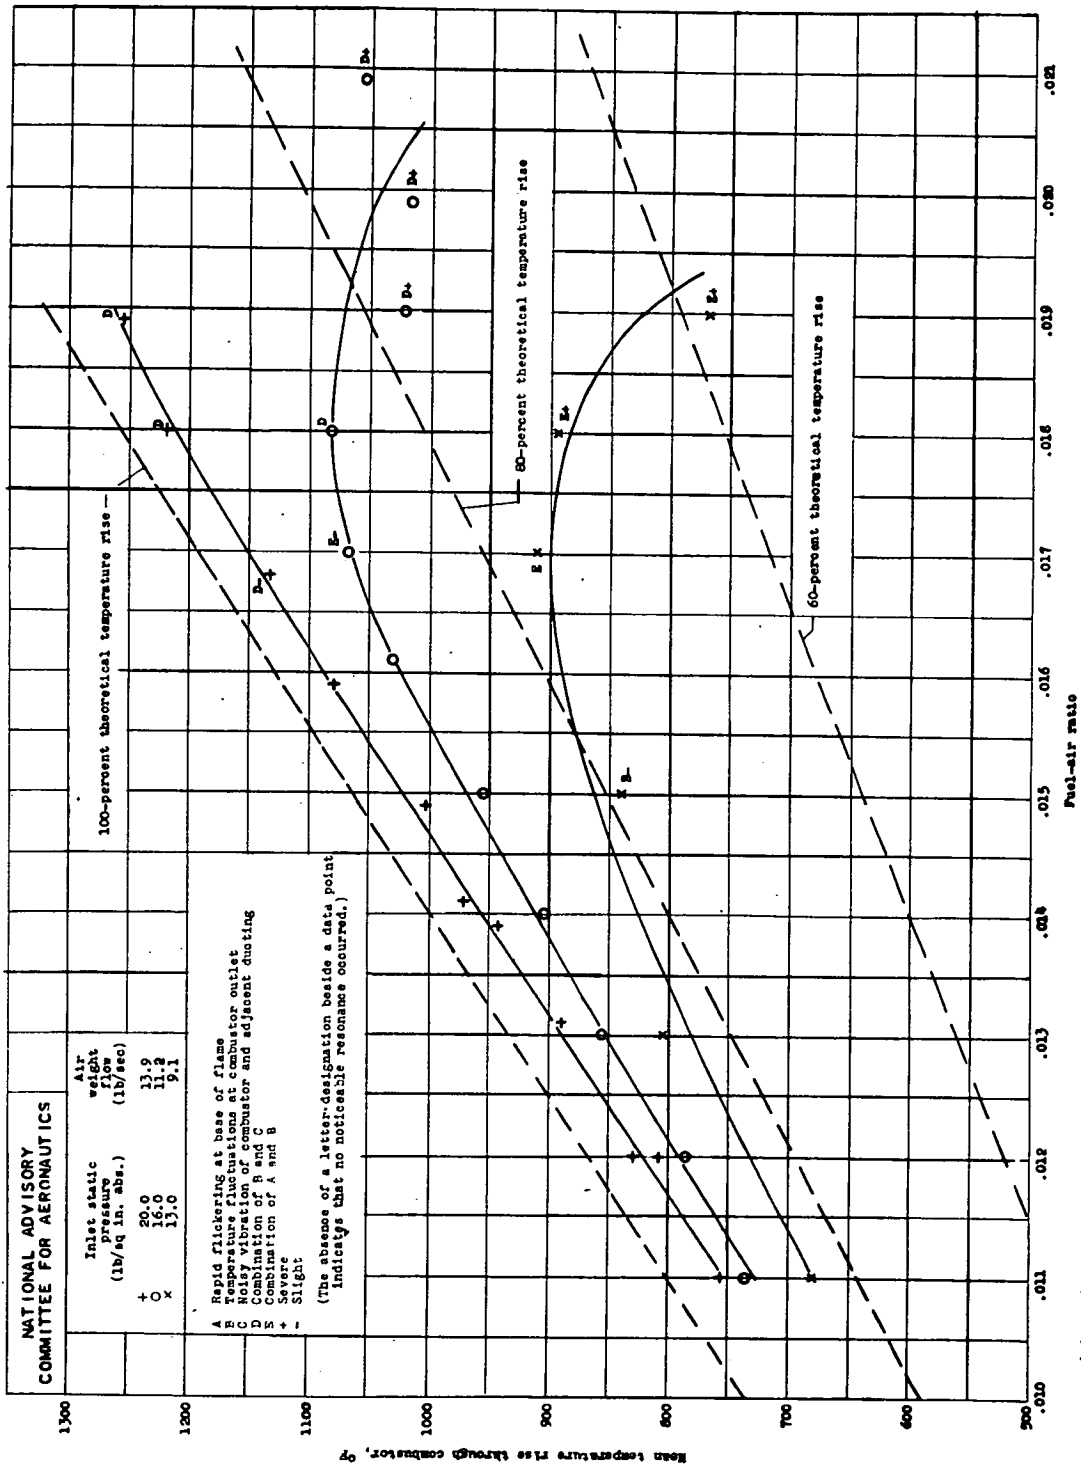


(a) Effect of altering static pressure at combustor inlet. Inlet temperature, 190° F; inlet velocity, 260 feet per second. Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 15,500 rpm and an altitude of 24,000 feet.

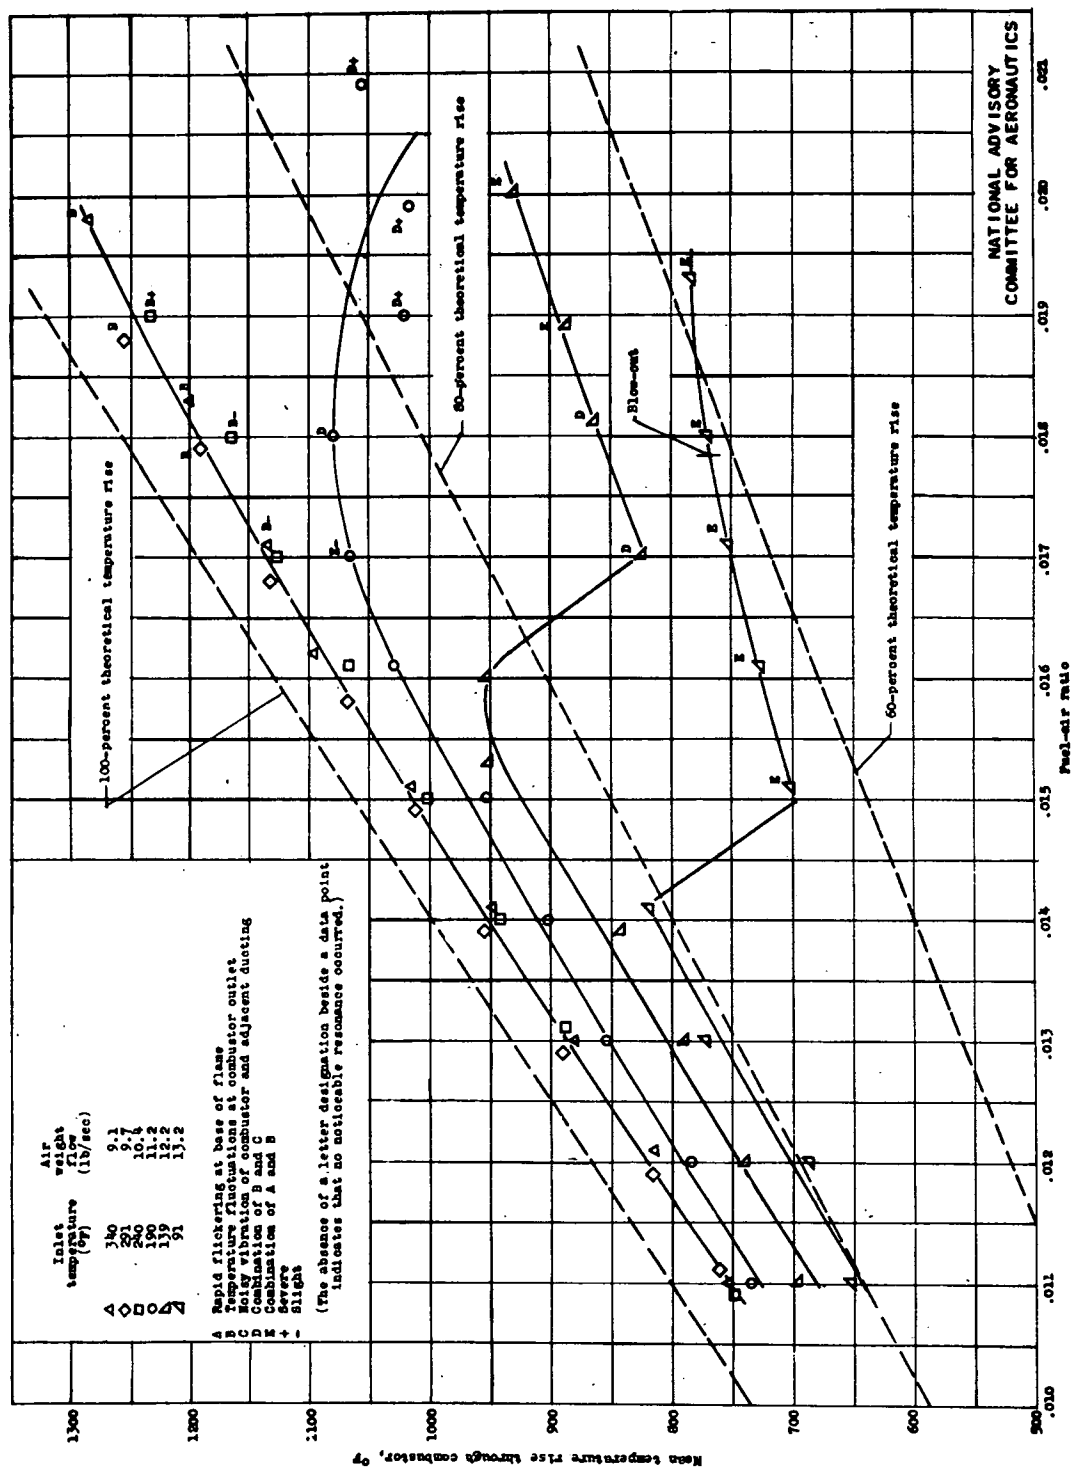

(b) Effect of altering temperature at combustor inlet. Inlet static pressure, 16.0 pounds per square inch absolute; inlet velocity, 260 feet per second. Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 15,500 rpm and an altitude of 24,000 feet.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

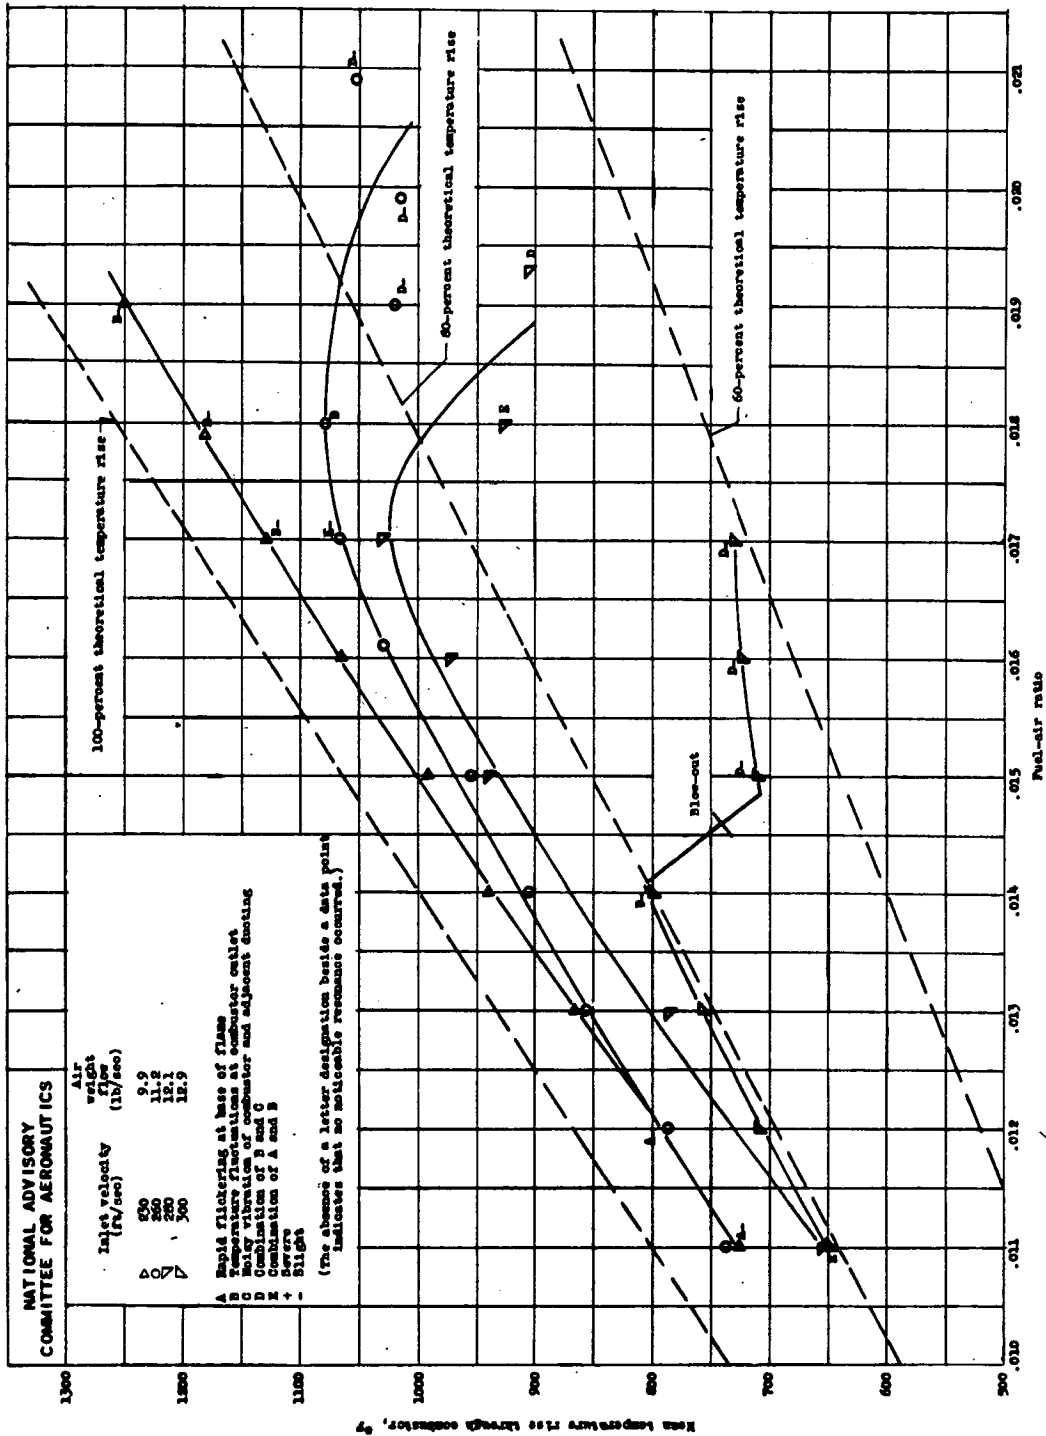

(c) Effect of altering velocity at combustor inlet. Inlet temperature, 190° F; inlet static pressure, 16.0 pounds per square inch absolute. Figure 9. - Concluded. Variation of mean temperature rise through combustor with fuel-air ratio for combustor-inlet conditions independently altered from values simulating engine operation at rotational speed of 15,500 rpm and an altitude of 24,000 feet.

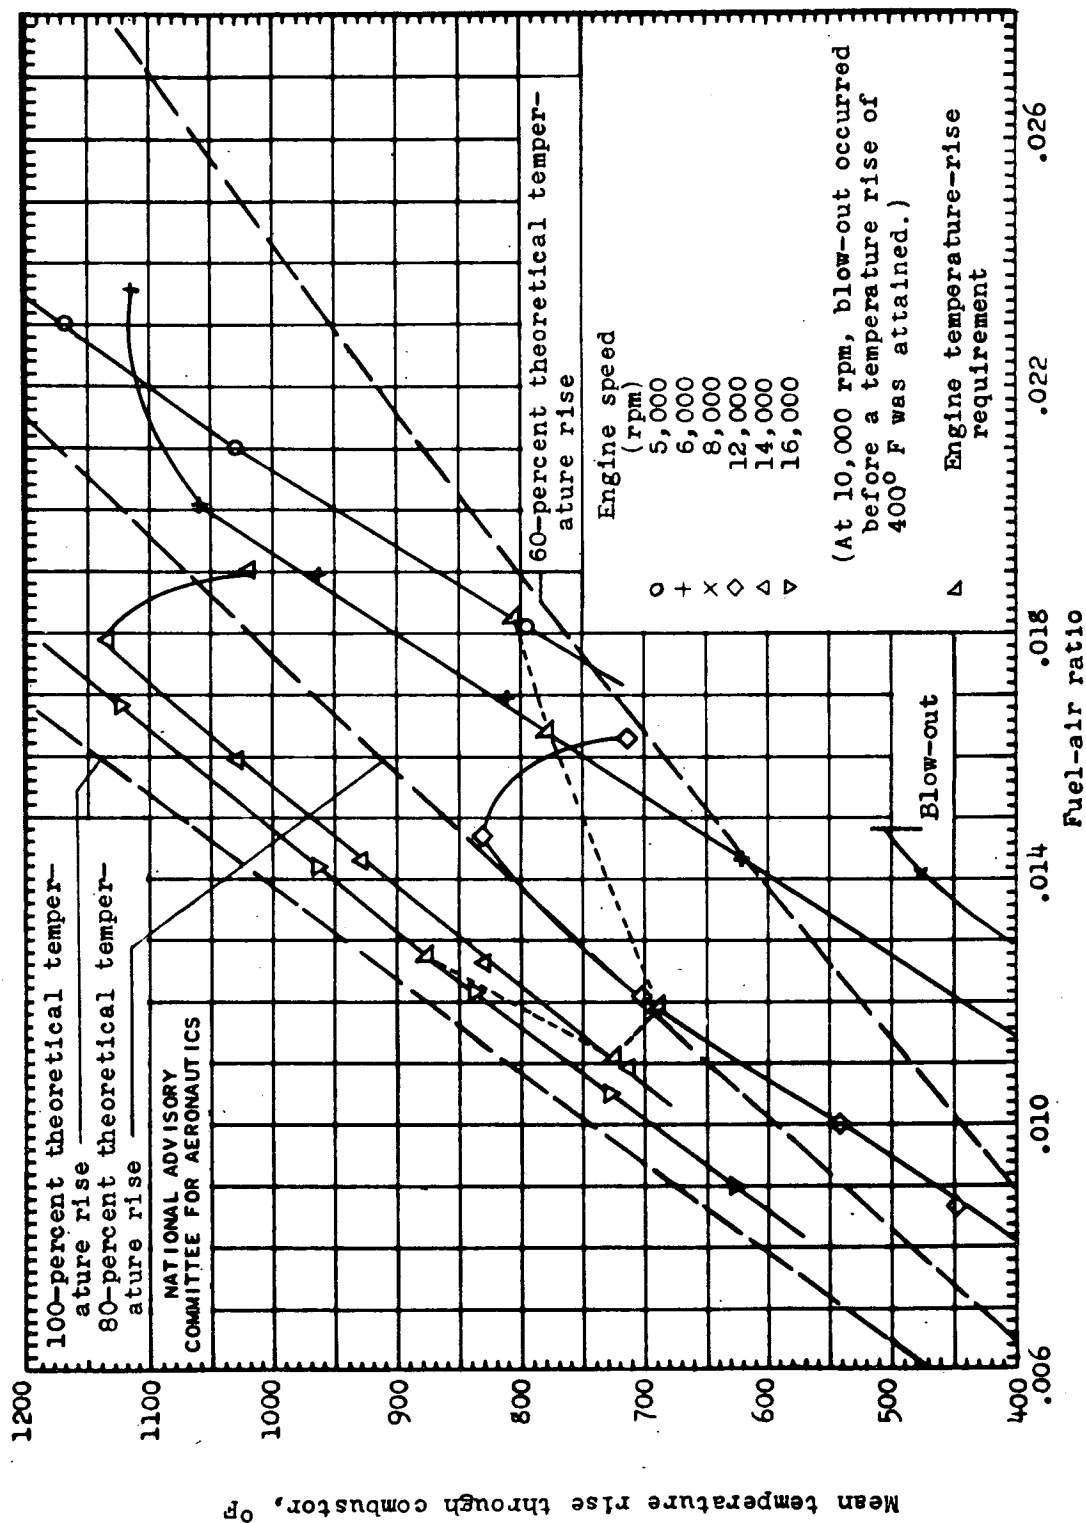


Figure 10. - Operation of combustor with inlet conditions corresponding to various engine speeds at altitude of 20,000 feet. Static operation; tail cone retracted.

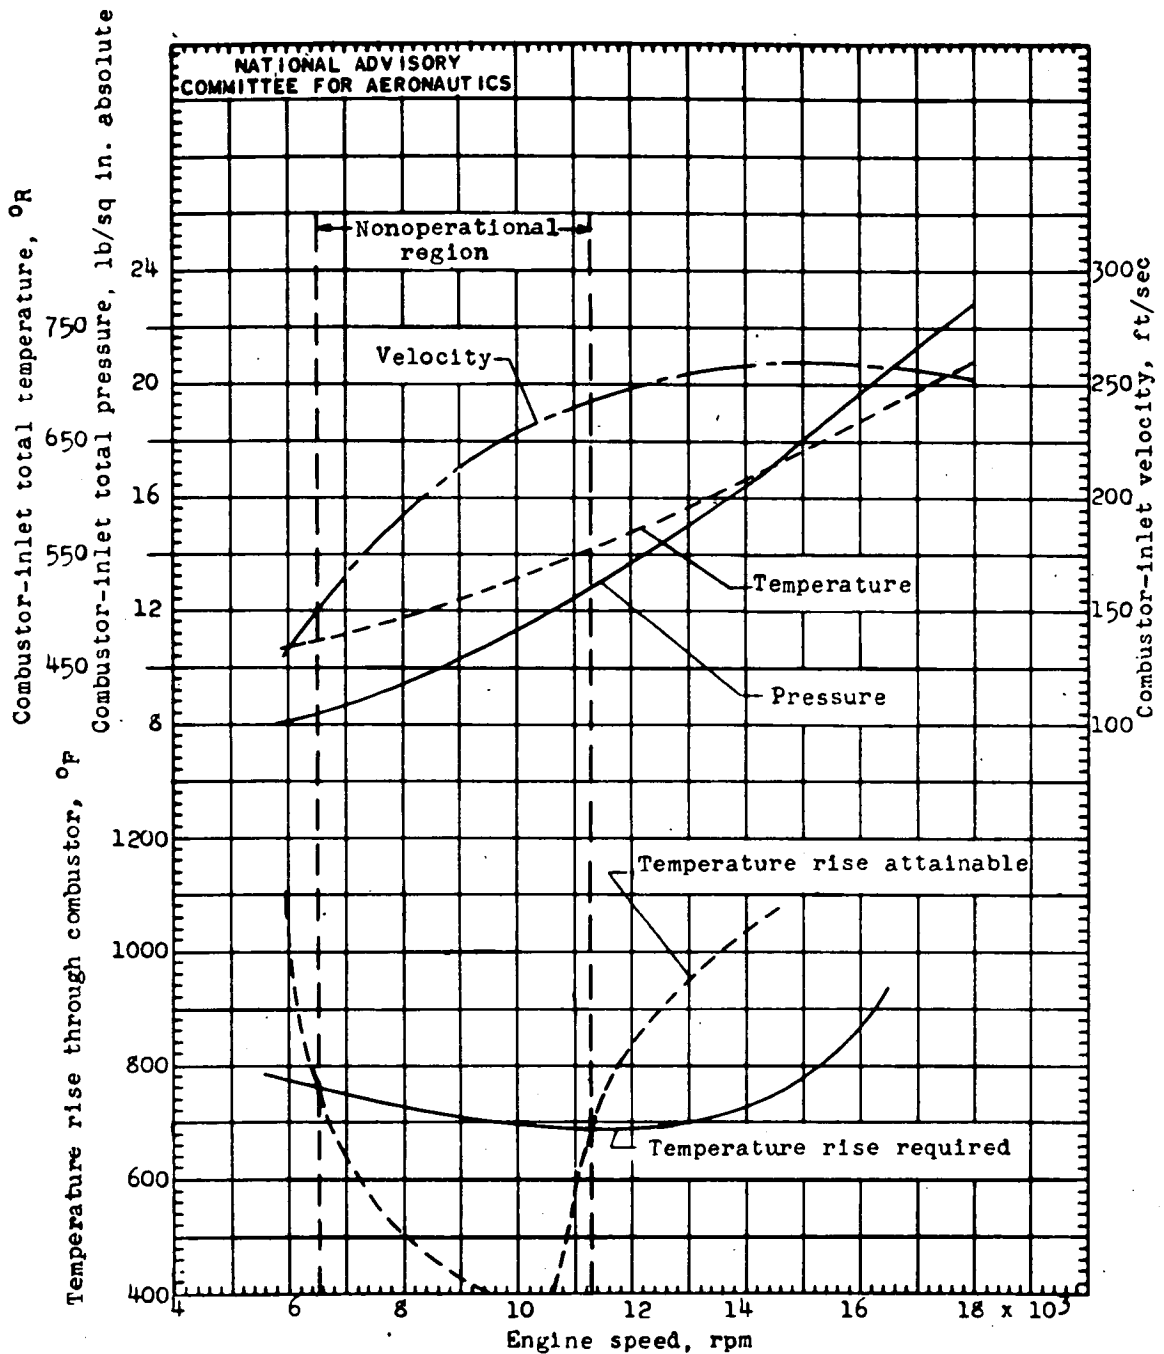


Figure 11. - Combustor operating conditions in jet-propulsion engine at various engine speeds at altitude of 20,000 feet. Static operation; tail cone retracted.


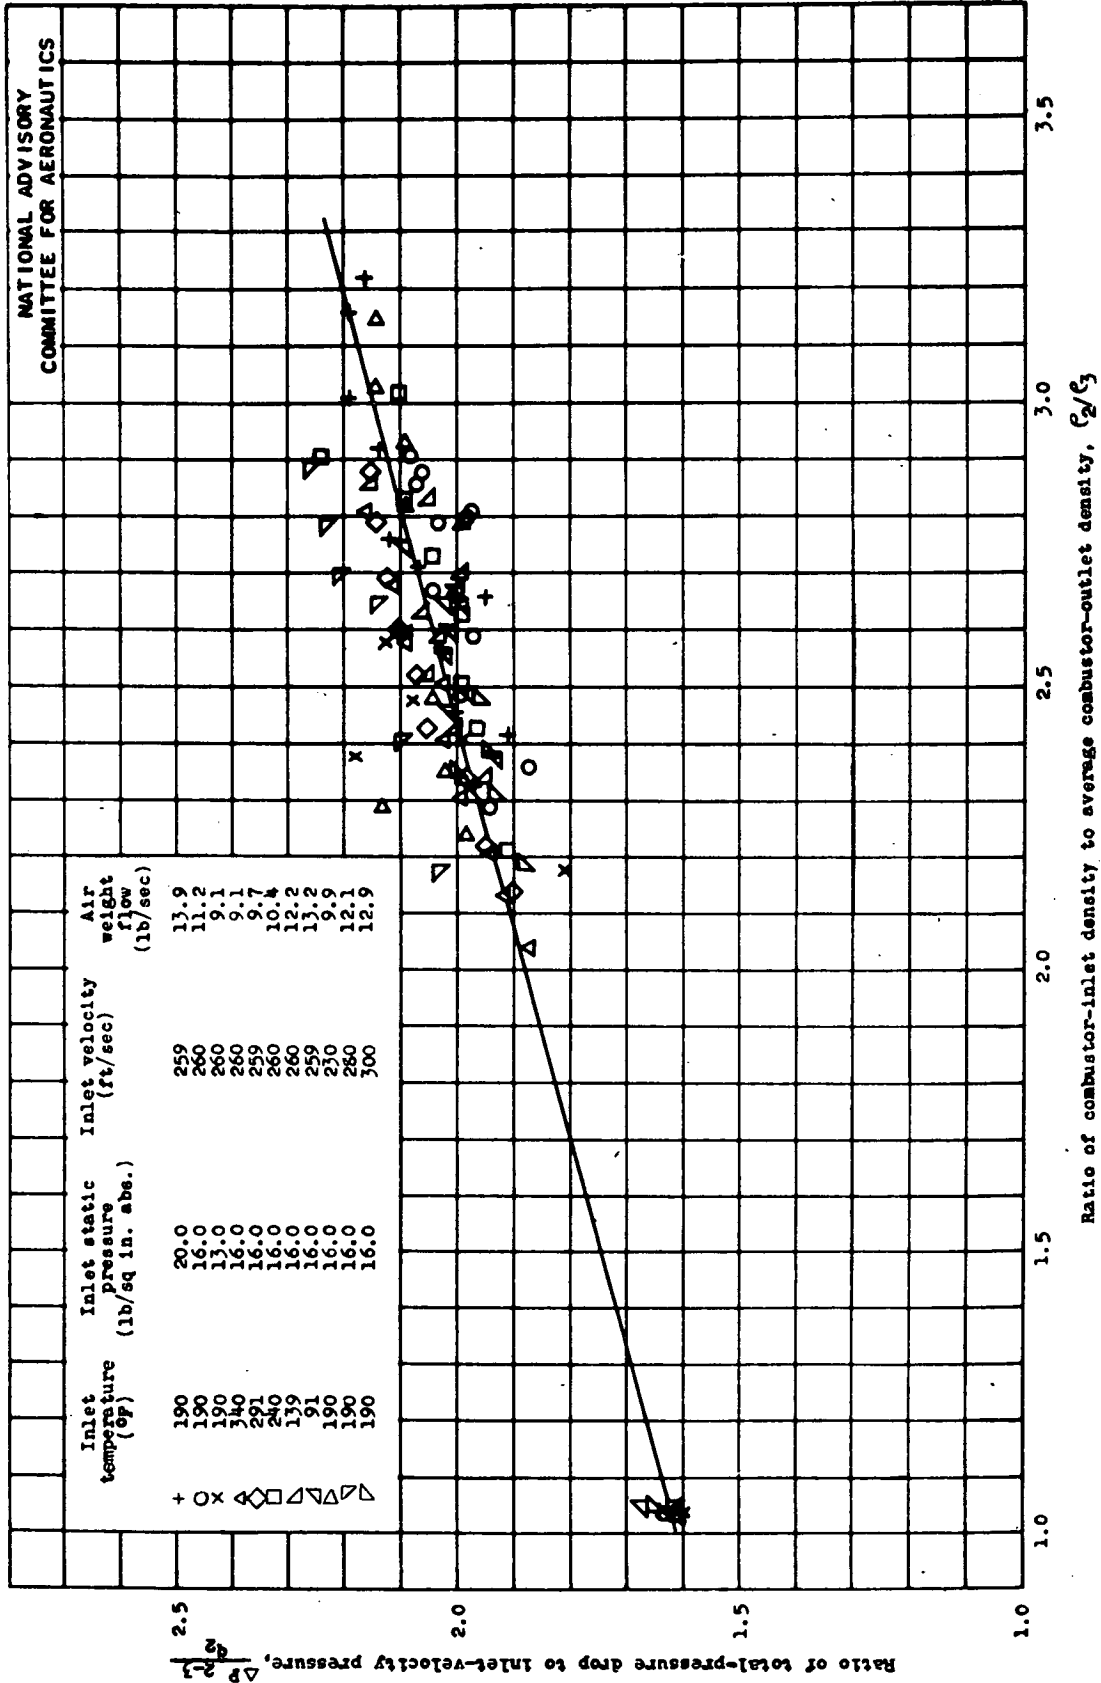


Figure 12. - Correlation of total-pressure drop through combustor. Data from study of effect of independently altering combustor-inlet parameters from values simulating static operation of engine at 15,500 rpm and altitude of 24,000 feet.

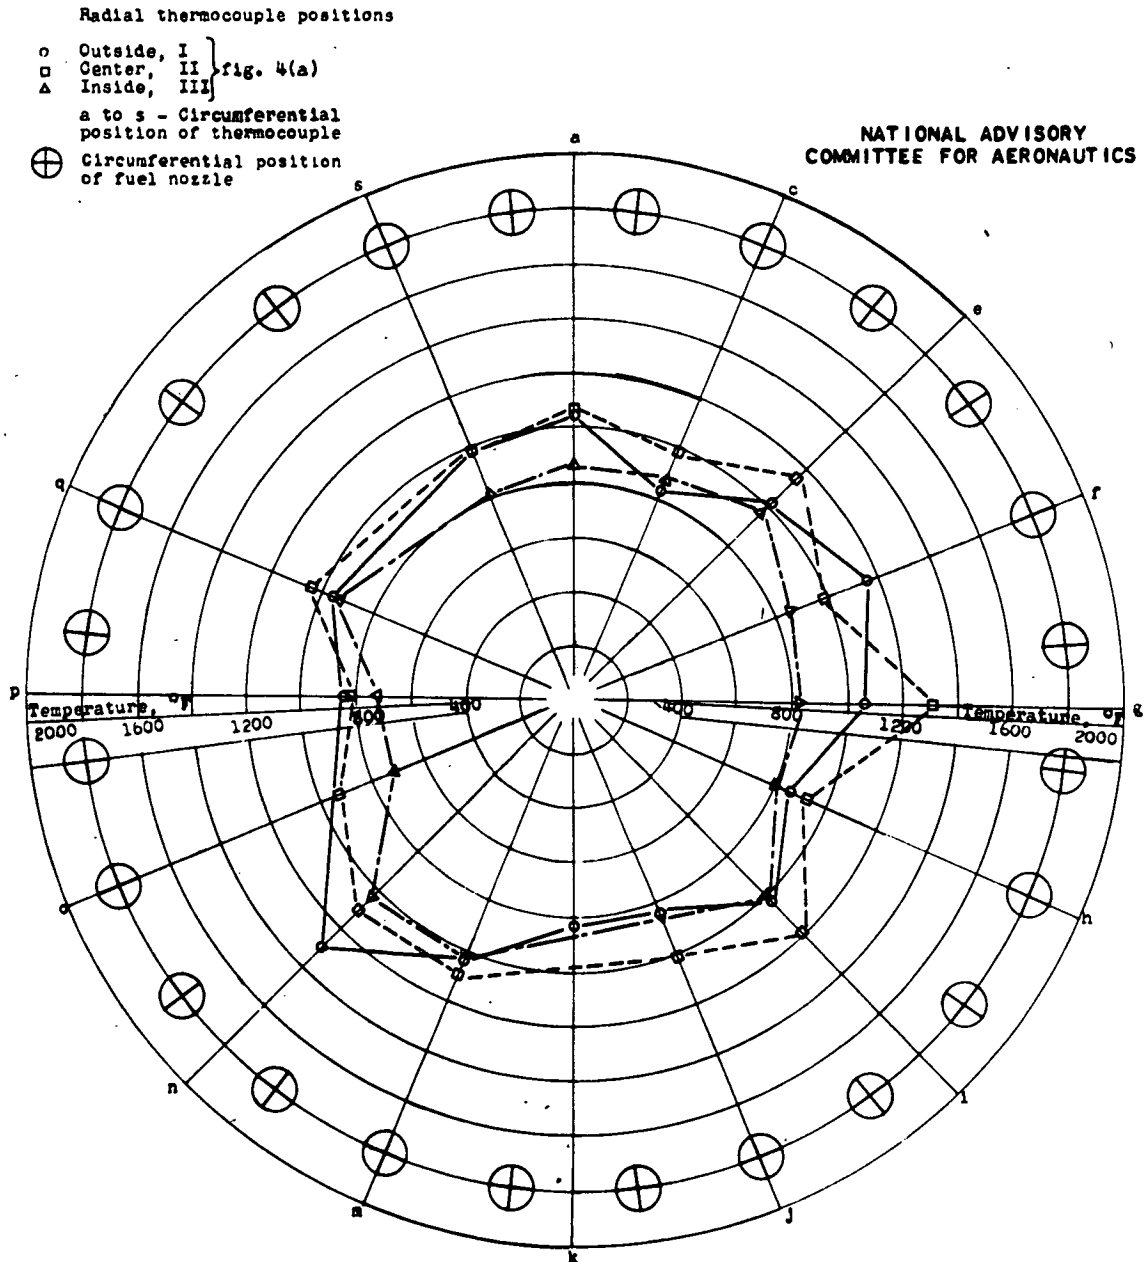

(a) Inlet static pressure, 13.41 pounds per square inch absolute; inlet temperature, 71° F; inlet velocity, 216 feet per second; fuel-air ratio, 0.0139; mean outlet temperature, 966° F.

Figure 13. - Temperature distribution at combustor outlet for representative runs.


Radial thermocouple positions

- o Outside, I } fig. 4(a)
 □ Center, II }
 △ Inside, III }

a to s - Circumferential position of thermocouple

- ⊕ Circumferential position of fuel nozzle

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

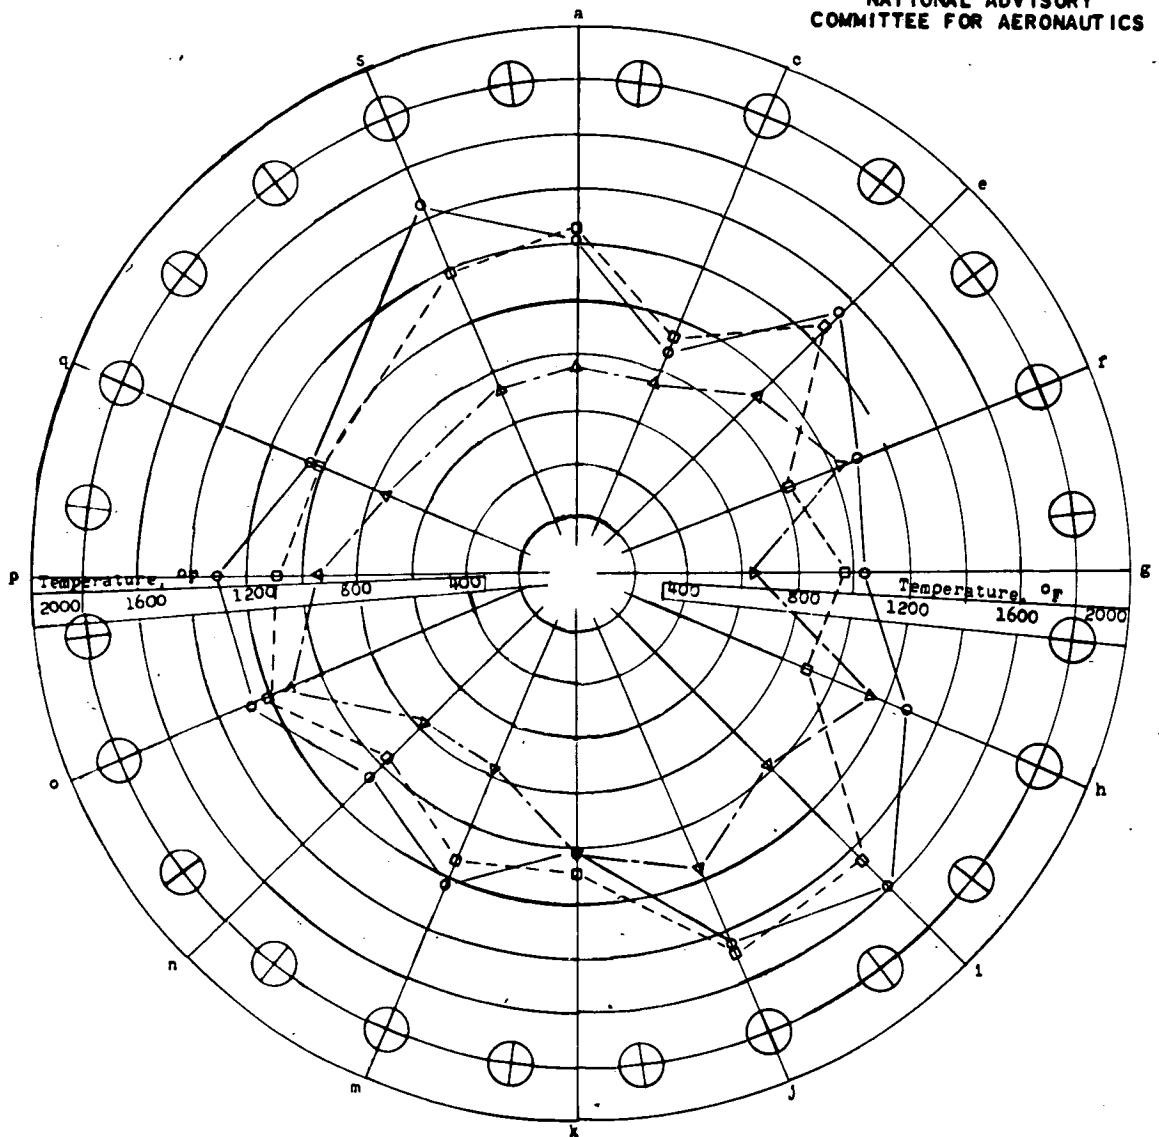

(b) Inlet static pressure, 13.39 pounds per square inch absolute; inlet temperature, 65° F;
inlet velocity, 214 feet per second; fuel-air ratio, 0.016 mean outlet temperature,
1042° F.


Figure 13. - Continued. Temperature distribution at combustor outlet for representative runs.

Radial thermocouple positions

- Outside, I
 □ Center, II
 Δ Inside, III
- } fig. 4(a)


a to s - Circumferential
position of thermocouple
Circumferential position
of fuel nozzle

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

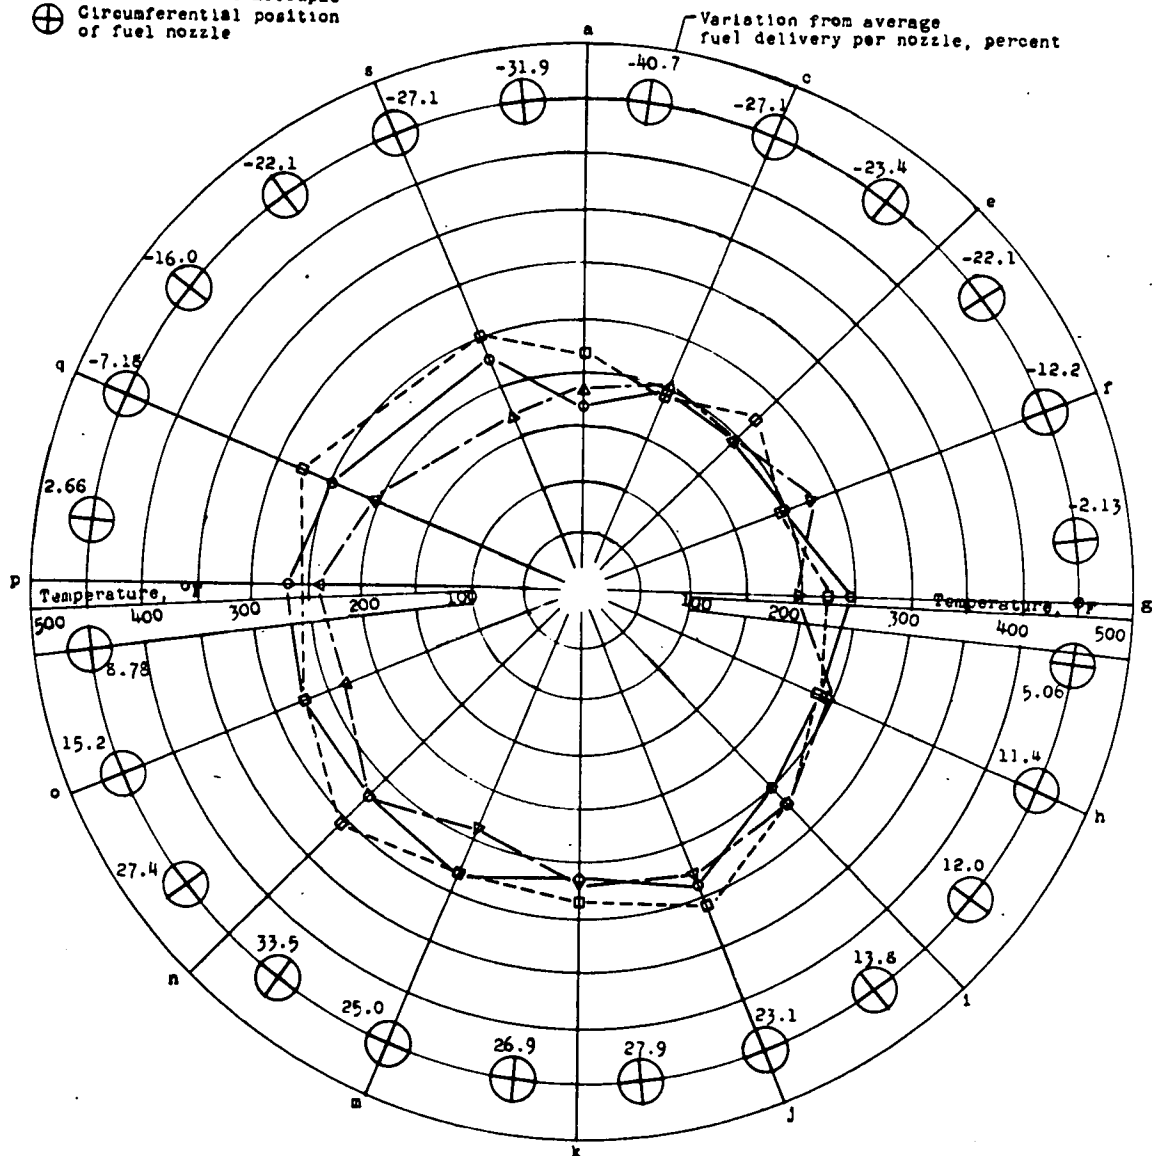


(c) Inlet static pressure, 13.40 pounds per square inch absolute; inlet temperature, 75° F; inlet velocity, 197 feet per second; fuel-air ratio, 0.00322; mean outlet temperature, 240° F.

Figure 15. - Continued. Temperature distribution at combustor outlet for representative runs.

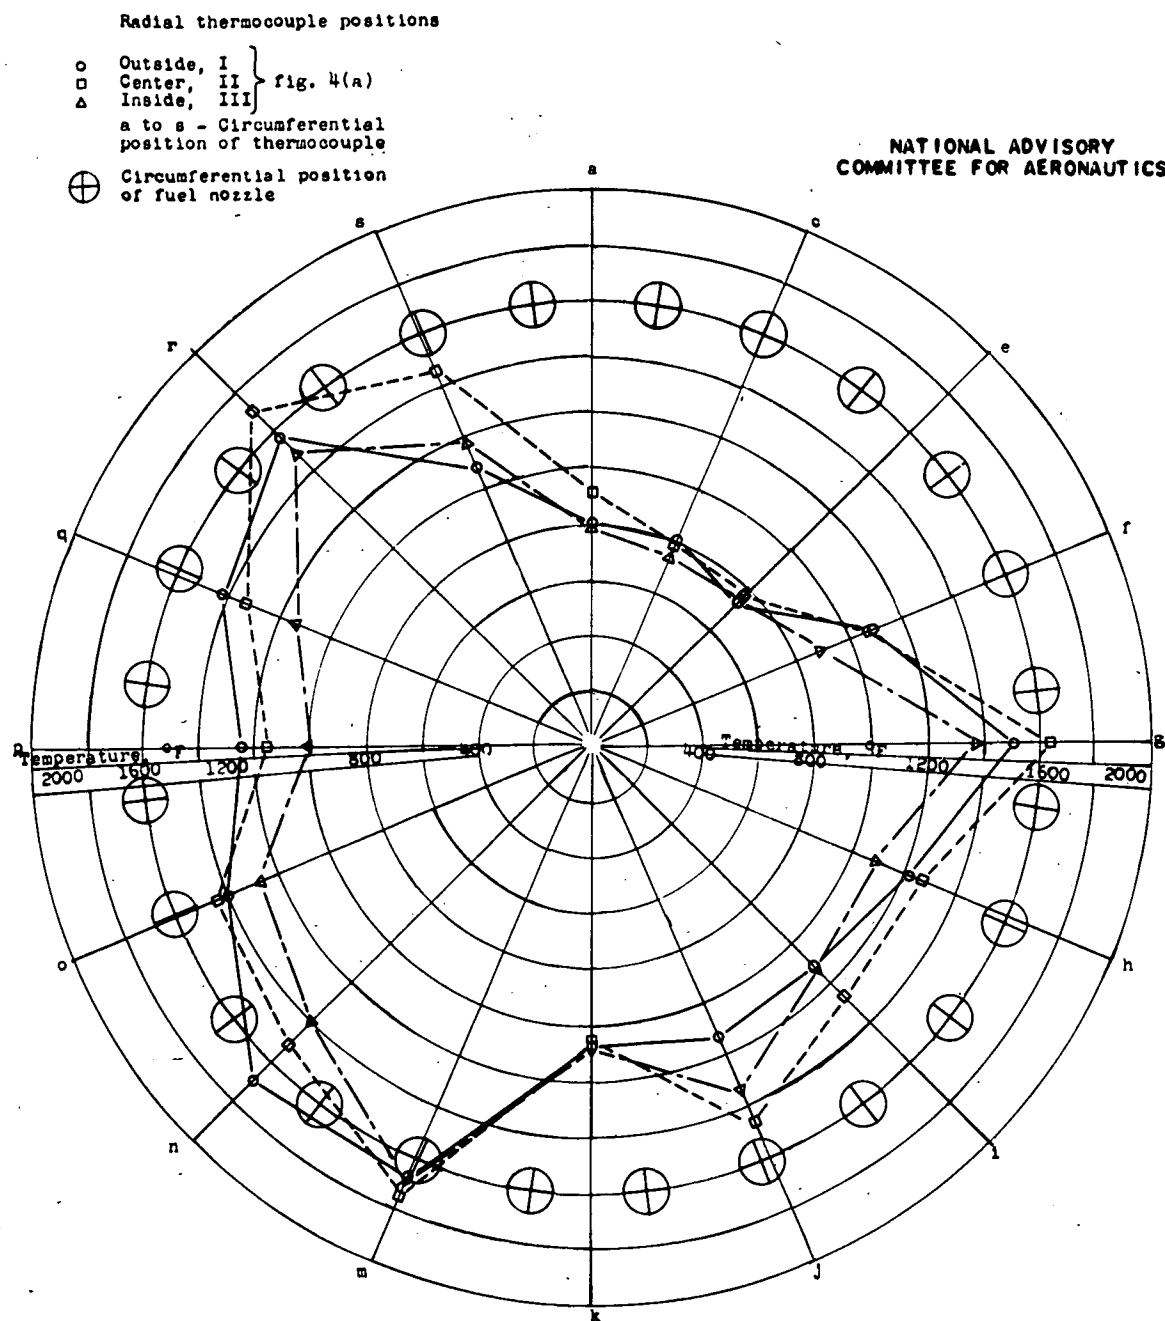

(d) Inlet static pressure, 16.00 pounds per square inch absolute; inlet temperature, 340° F; inlet velocity, 260 feet per second; fuel-air ratio, 0.0130; mean outlet temperature, 1222° F.

Figure 13. - Concluded. Temperature distribution at combustor outlet for representative runs.

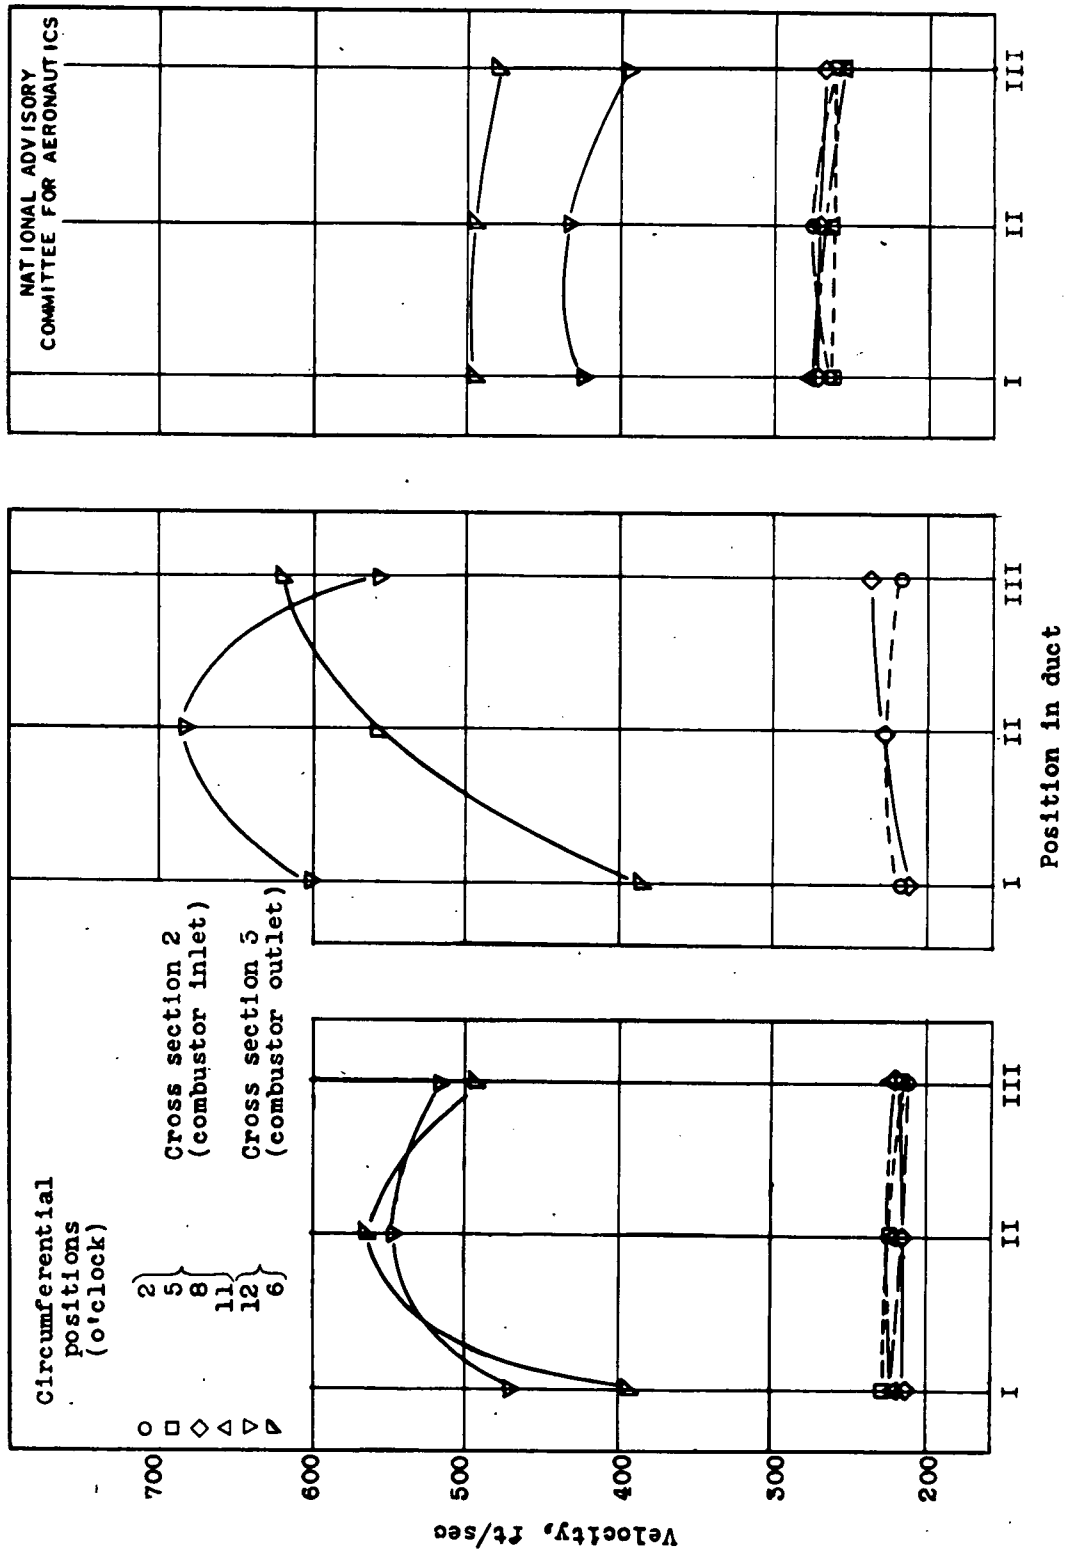

(a) Run shown in figure 13(a). (b) Run shown in figure 13(b). (c) Run shown in figure 13(d).
Figure 14. - Velocity distribution at inlet and outlet of combustor for representative runs.

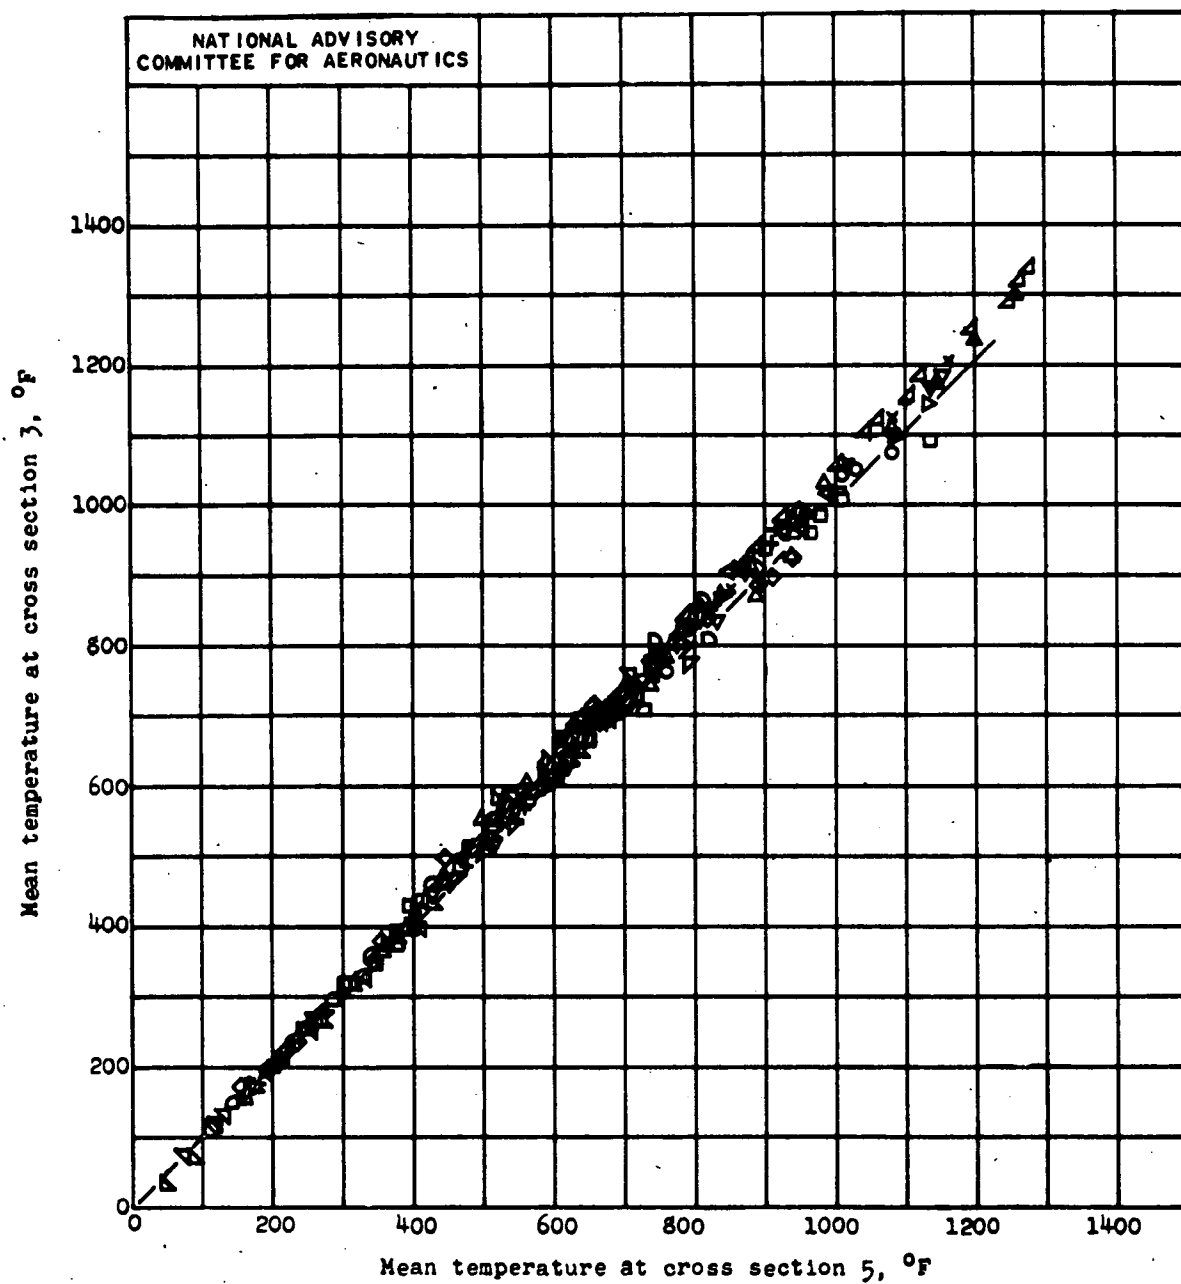


Figure 15. - Comparison of mean temperature at cross section 3 with mean temperature at cross section 5.

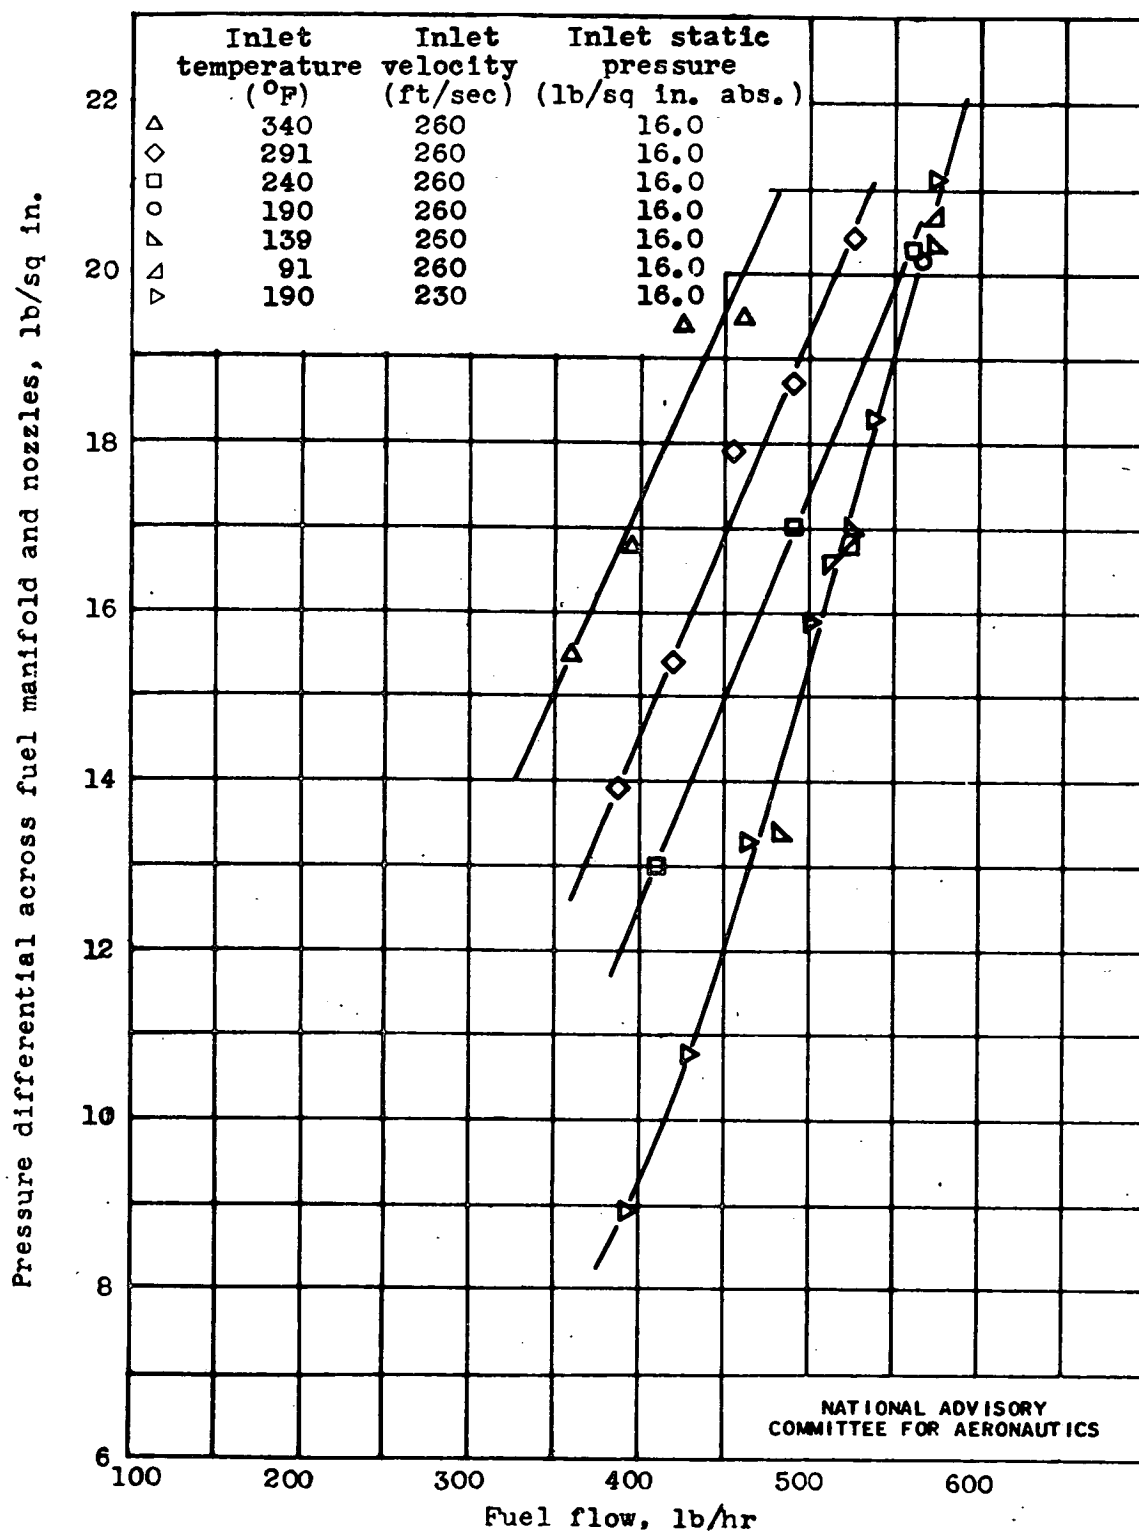


Figure 16.- Pressure differential measured across fuel manifold and nozzles as function of fuel flow for all runs with same set of fuel nozzles.